



Towing and Suspension Solutions

851977-03 07-14

ROADMASTER, Inc. 6110 NE 127th Ave. Vancouver, WA 98682 800-669-9690 Fax: 360-735-9300 roadmasterinc.com

Sterling handle springs and caps replacement kit

for Sterling and Sterling All Terrain tow bars – part number 910652

Installation Instructions

All specifications are subject to change without notice

CAUTION

Read the instructions before installing the kit components. Failure to understand how to install this product could result in property damage.



Kit components




This kit contains the components for two Sterling or Sterling All Terrain handle caps and springs –
(4) rubber caps (2) locking springs
(2) retaining rings

Required tools

A pair of snap ring pliers

Installation instructions

1. Work on one tow bar arm at a time.
The tow bar arm must be fully extended (Figure 1).
2. Use snap ring pliers to remove the retaining ring (Figure 2) that secures the torsion pin.
3. Remove the torsion pin (Figure 3).
4. Remove the rubber caps (Figure 4).
5. Remove the original locking spring and insert the re-

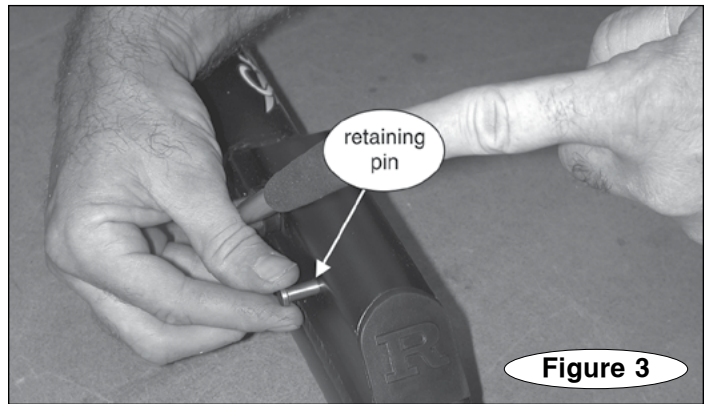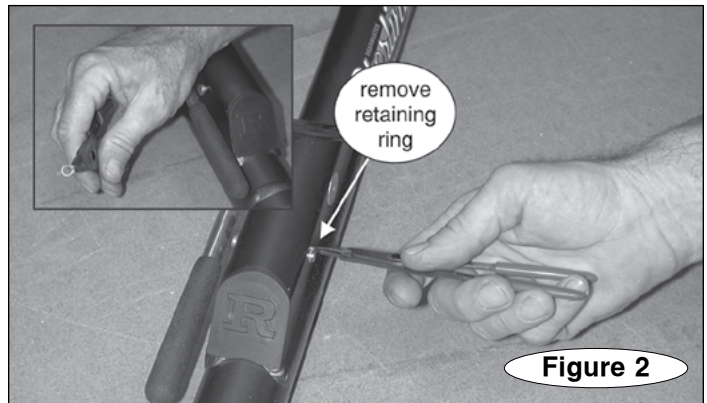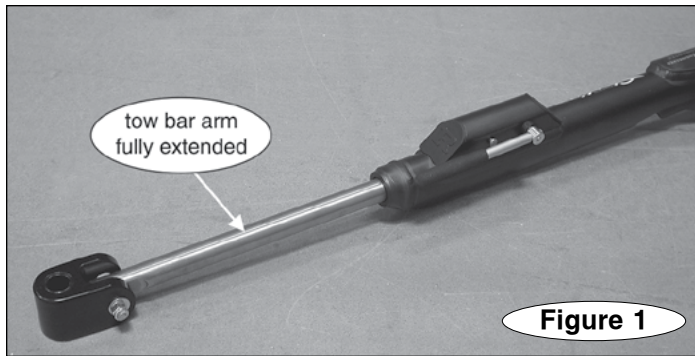

IMPORTANT NOTICE!

Safety Definitions

These instructions contain information that is very important to know and understand. This information is provided for safety and to prevent equipment problems. To help recognize this information, observe the following symbols:

WARNING

WARNING indicates a potentially hazardous situation which, if not avoided, could result in property damage, serious personal injury or even death.

CAUTION

CAUTION indicates a potentially hazardous situation which, if not avoided, may result in property damage, or minor or moderate personal injury.

CAUTION

CAUTION used without the safety alert symbol indicates a potentially hazardous situation which, if not avoided, may result in property damage.

NOTE

Refers to important information and is placed in italic type. It is recommended that you take special notice of these items.

continued on next page

continued from preceding page
provided retaining rings.

7. Replace the original rubber caps with the replacement caps.

8. Ensure that the release handle works correctly – when installed correctly, the release handle will have spring pressure and the tow bar will function correctly without binding.

9. Repeat for the other tow bar arm.

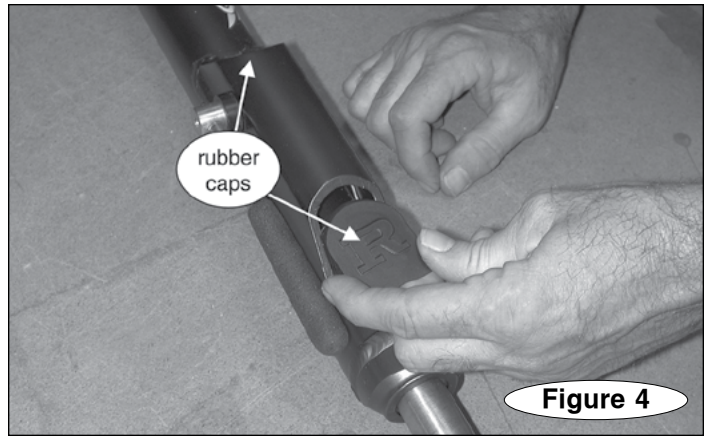


Figure 4

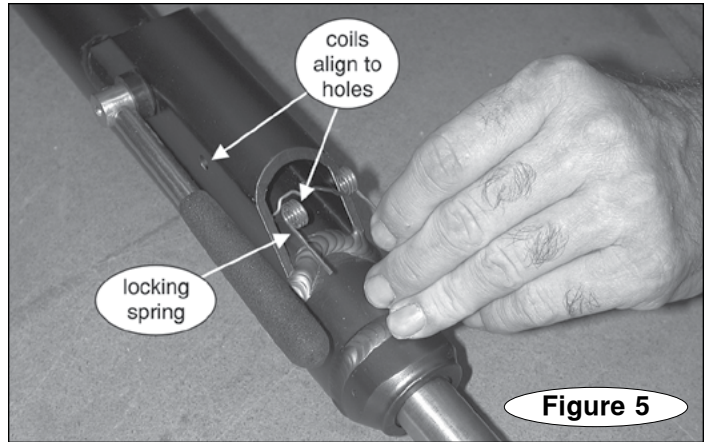


Figure 5

910652

Sterling handle springs and caps replacement kit

for Sterling and Sterling All Terrain tow bars

Installation Instructions

