




SEAT ADAPTOR KIT #88114 INSTALLATION INSTRUCTIONS



3129-01

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

ROADMASTER, Inc. 6110 NE 127th Ave. Vancouver, WA 98682 1-800-669-9690 fax 360-735-9300 www.roadmasterinc.com

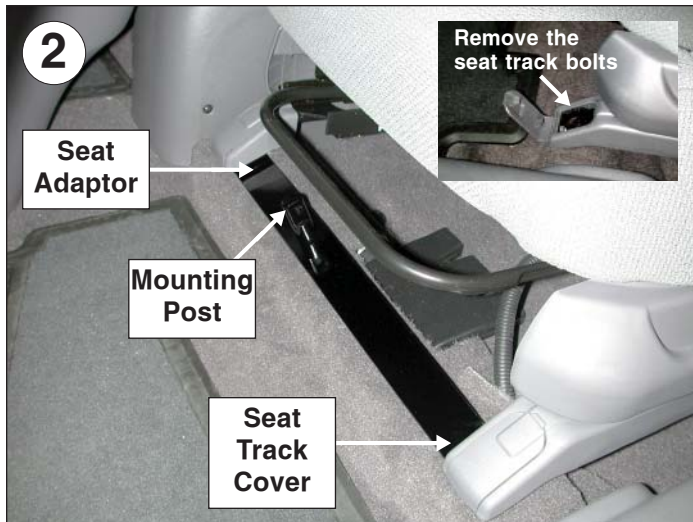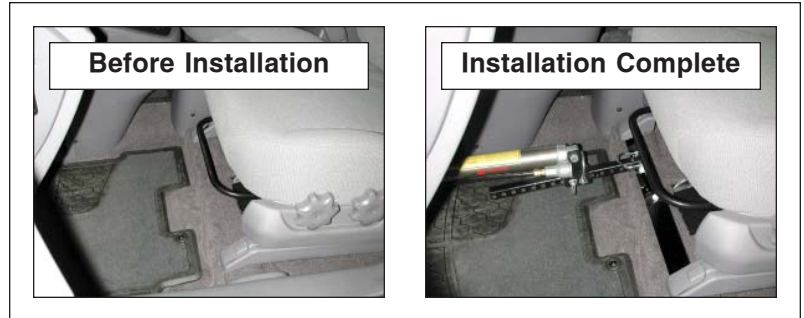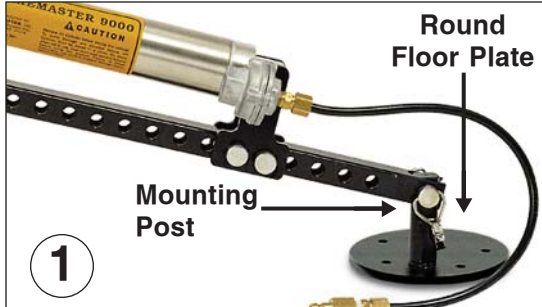

Parts List
(1) 3/8" lock washer

Instructions

1. Before installing the seat adaptor, the mounting post (that was included with your BrakeMaster system) must be removed from the round plate (Fig.1). First, secure the round plate in a vise. Use a wrench to loosen the mounting post, while holding the bolt with an Allen wrench. Don't try to turn the Allen bolt with the Allen wrench, as you might damage the wrench or bolt. Use a 1/2" open-end wrench to twist the mounting post off. Then, secure the mounting post to the center of the seat adaptor, using the included 3/8" x 3/4" bolt and 3/8" lock washer.

2. Snap open the plastic seat track covers on each side, and remove the two 14mm (head) bolts under each seat track cover (inset, Fig.2). The mounting post is offset, to align with the brake pedal. Check the alignment of the mounting post to the brake pedal, then set the seat adaptor over the holes for the seat track bolts you just removed. Re-install the factory seat mounting bolts to secure the seat adaptor in place. Close the plastic seat track covers.



WARNING

Failure to follow these instructions can result in property damage, personal injury or even death.