



1-800-669-9690



SEAT ADAPTOR KIT #88138 INSTALLATION INSTRUCTIONS




3765-01

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

ROADMASTER, Inc. 6110 NE 127th Ave. Vancouver, WA 98682 1-800-669-9690 fax 360-735-9300 www.roadmasterinc.com

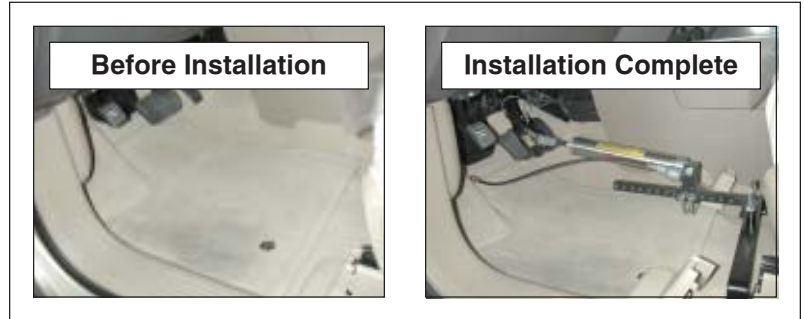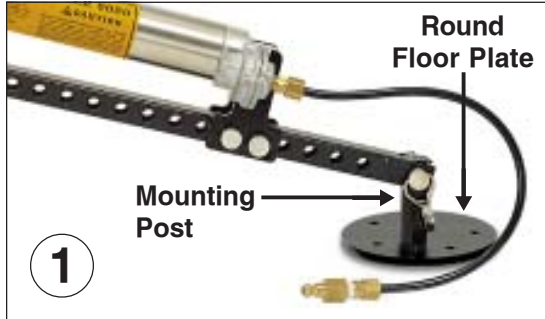

- ## Parts List
- (1) 3/8" lock washer
 - (1) 3/8" x 3/4" bolt

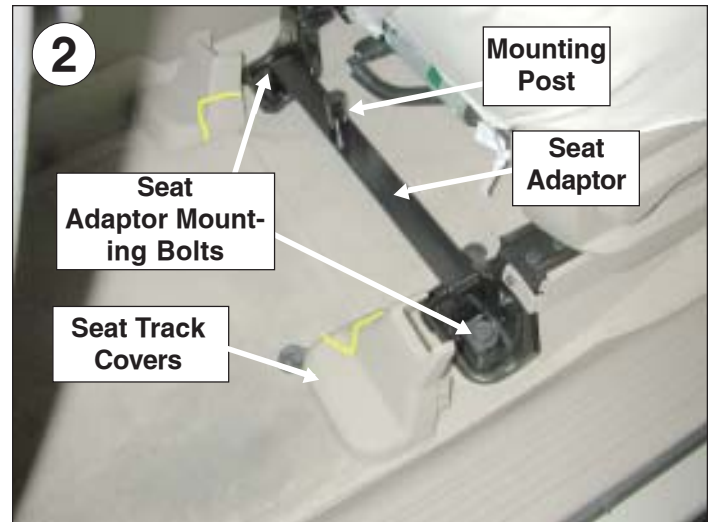

Instructions

1. Before installing the seat adaptor, the mounting post (that was included with your BrakeMaster system) must be removed from the round plate (Fig.1). First, secure the round plate in a vise. Use a wrench to loosen the mounting post, while holding the bolt with an Allen wrench. Don't try to turn the Allen bolt with the Allen wrench, as you might damage the wrench or bolt. Use a 1/2" open-end wrench to twist the mounting post off. Then, secure the mounting post to the center of the seat adaptor, using the included 3/8" x 3/4" bolt and 3/8" lock washer.
2. Remove the seat track covers and the two 18mm factory seat track mounting bolts. Place the seat adaptor over the holes you removed the 18mm factory seat track mounting bolts from. Bolt the adaptor into place using the 18mm factory seat track mounting bolts. The seat track covers need to be trimmed to accommodate the seat adaptor. Use the yellow lines as a guide for correct trimming or you can leave them off.



WARNING

Failure to follow these instructions can result in property damage, personal injury or even death.