


# SEAT ADAPTOR KIT #88158 INSTALLATION INSTRUCTIONS



2892-03

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

ROADMASTER, Inc. 6110 NE 127th Ave. Vancouver, WA 98682 1-800-669-9690 fax 360-735-9300 www.roadmasterinc.com

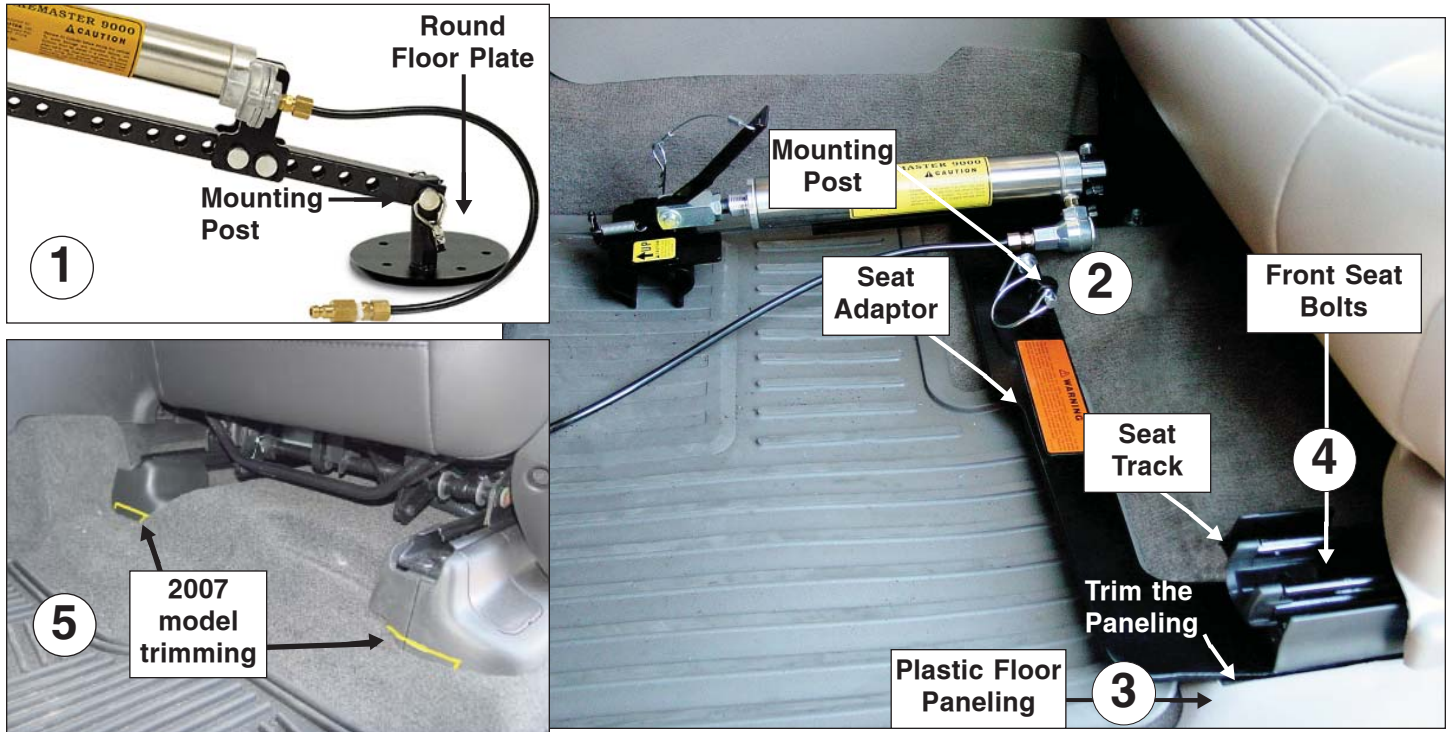

## Instructions

1. Before installing the seat adaptor, the mounting post (that was included with your BrakeMaster system) must be removed from the round plate (Fig.1). Secure the round plate in a vise. Use a wrench to loosen the mounting post, while holding the bolt with an Allen wrench. Don't try to turn the Allen bolt with the Allen wrench, as you might damage the wrench or bolt. Use a 1/2" open-end wrench to twist the mounting post off. Then, secure the mounting post to the center of the seat adaptor, using the included 3/4" x 3/8" bolt and 3/8" lock washer.
2. Then, secure the mounting post to the center of the seat adaptor, using the included 3/4" x 3/8" bolt and 3/8" lock washer. Use an E20 Torx socket, or either a 15mm 6 pt. or 15mm 12 pt. socket. Remove the two front seat bolts (one on each side) that secure the seat to the seat track.
3. Trim the plastic floor paneling as indicated. *Note:* refer to figure 5 for trimming on the 2007 models.
4. Slide the seat adaptor in the seat track, over the front seat bolt holes, and reinstall the front seat bolts. Tighten.



*Note:* some 2008 models with adjustable pedals may not require the adjusting arm on the air cylinder (Fig.1). Instead, it will mount directly to the mounting post, as shown in Figure 6.

## Parts List

- (1) 3/8" Lock Washer
- (1) 3/4" x 3/8" Bolt



**WARNING**

Failure to follow these instructions can result in property damage, personal injury or even death.