



1-800-669-9690

SEAT ADAPTOR KIT #88181 INSTALLATION INSTRUCTIONS



3014-01

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE




ROADMASTER, Inc.

6110 NE 127th Ave.

Vancouver, WA 98682

1-800-669-9690

www.roadmasterinc.com

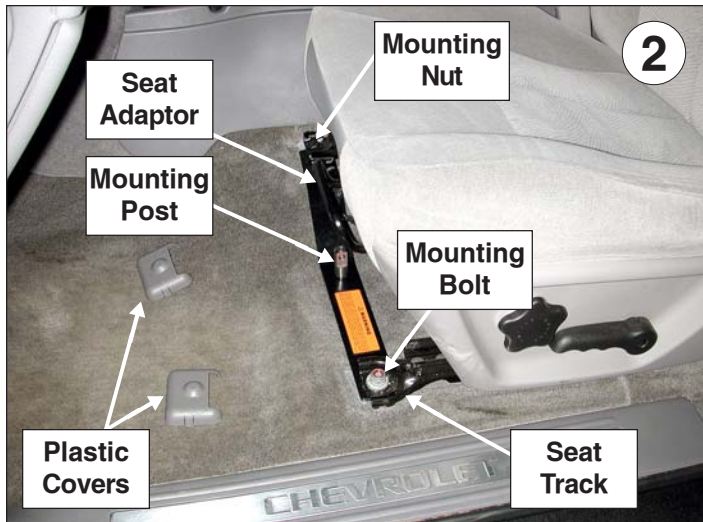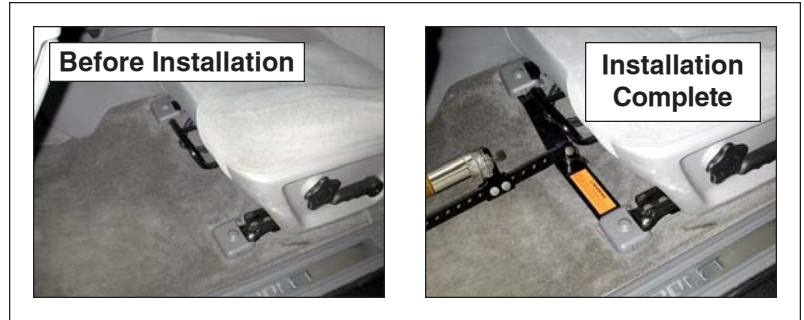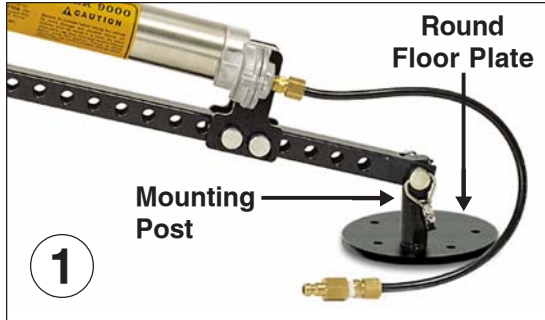

Parts List
(1) 3/8" Lock Washer

Instructions

1. Before installing the seat adaptor, the mounting post (that was included with your BrakeMaster system) must be removed from the round plate (Fig.1). Secure the round plate in a vise. Use a wrench to loosen the mounting post, while holding the bolt with an Allen wrench. Don't try to turn the Allen bolt with the Allen wrench, as you might damage the wrench or bolt. Use a 1/2" open-end wrench to twist the mounting post off. Then, secure the mounting post to the the seat adaptor, using the included 3/8" x 3/4" bolt from the factory plate and a 3/8" lock washer.
2. Snap off the plastic seat track covers on each side. Remove the front seat mounting bolt on the driver side, and the front seat mounting nut on the passenger side. The mounting post on the seat adaptor is offset, to align with the brake pedal. Check the alignment of the mounting post to the brake pedal, then set the seat adaptor in place under the seat track and over the bolt and nut holes. Re-install the factory mounting bolt and nut, and tighten them to secure the seat adaptor in place. Replace the plastic seat track covers.



WARNING

Failure to follow these instructions can result in property damage, personal injury or even death.