



1-800-669-9690




SEAT ADAPTOR KIT #88183 INSTALLATION INSTRUCTIONS



Part# 3122

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

ROADMASTER, Inc. 6110 NE 127th Ave. Vancouver, WA 98682 1-800-669-9690 fax 360-735-9300 www.roadmasterinc.com

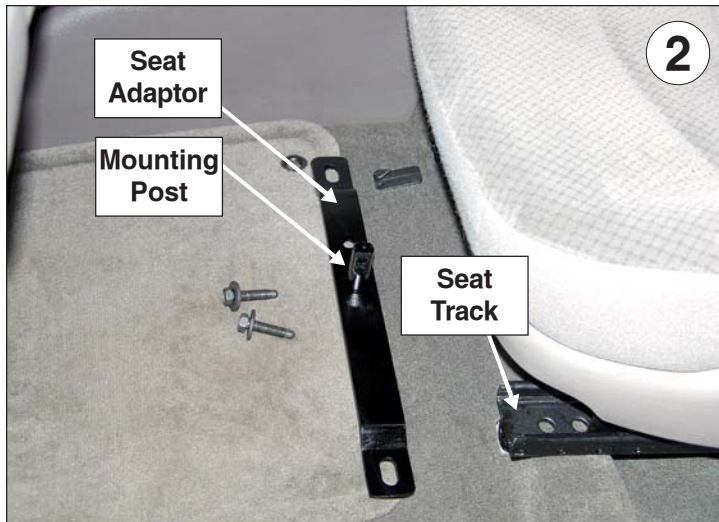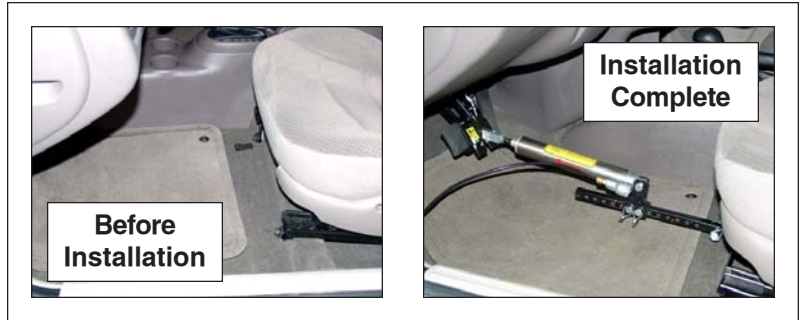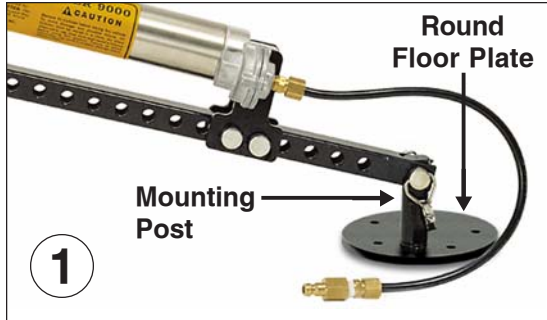

Parts List

- (1) 3/8" lock washer
- (1) 3/4" x 3/8" bolt

Instructions

1. Before installing the seat adaptor, the mounting post (that was included with your BrakeMaster system) must be removed from the round plate (Fig.1). Secure the round plate in a vise. Use a wrench to loosen the mounting post, while holding the bolt with an Allen wrench. Don't try to turn the Allen bolt with the Allen wrench, as you might damage the wrench or bolt. Use a 1/2" open-end wrench to twist the mounting post off.
This adaptor is designed to fit several different vehicles. There are two holes in the seat adaptor; test-fit the adaptor against the seat tracks, and chose the hole that aligns most directly to the brake pedal. Then, secure the mounting post to the seat adaptor, using the included 3/4" x 3/8" bolt and 3/8" lock washer.
2. Remove the two 15mm (head) bolts holding the seat tracks to the floor (one on each side). Position the seat adaptor over the top of the sat tracks, so that the pre-drilled holes at end are over the holes for the seat track bolts you just removed. Then, bolt the seat adaptor in place, using the 15mm factory bolts.



WARNING

Failure to follow these instructions can result in property damage, personal injury or even death.