




# SEAT ADAPTOR KIT #88241 INSTALLATION INSTRUCTIONS



85-2890-01 02-08

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

ROADMASTER, Inc. 6110 NE 127th Ave. Vancouver, WA 98682 1-800-669-9690 fax 360-735-9300 www.roadmasterinc.com

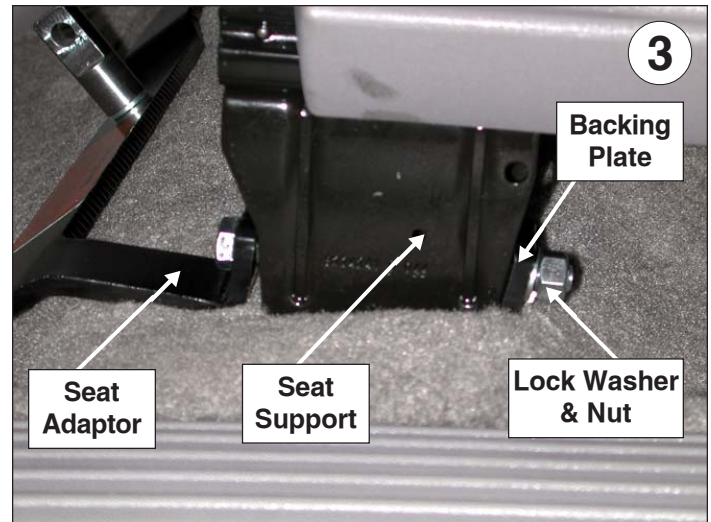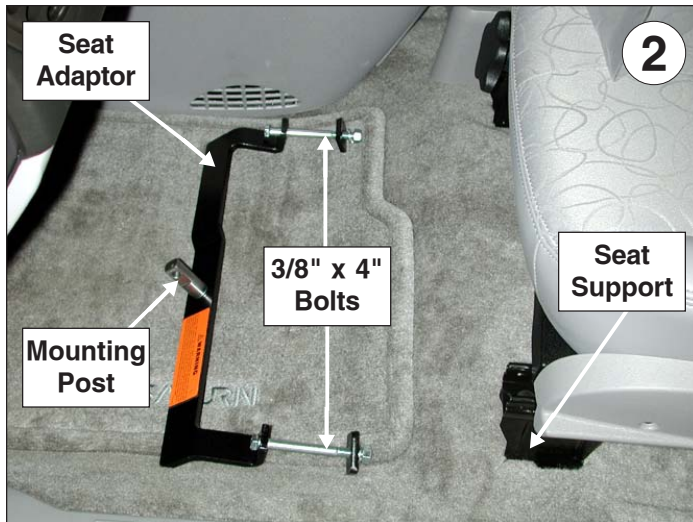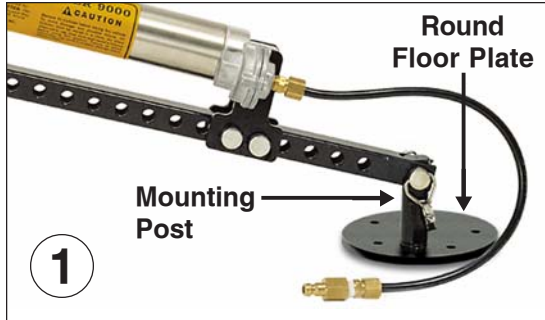


- ## Parts List
- (3) 3/8" Lock washers
  - (1) 3/4" x 3/8" Bolt
  - (2) 3/8" Nuts
  - (2) 4" x 3/8" Bolts
  - (2) 1 1/2" x 1" Backing plates

## Instructions for 2004 Saturn

1. Before installing the seat adaptor, the mounting post (that was included with your BrakeMaster system) must be removed from the round plate (Fig.1). Secure the round plate in a vise. Use a wrench to loosen the mounting post, while holding the bolt with an Allen wrench. Don't try to turn the Allen bolt with the Allen wrench, as you might damage the wrench or bolt. Use a 1/2" open-end wrench to twist the mounting post off.
2. Then, secure the mounting post to the center of the seat adaptor, using the included 3/4" x 3/8" bolt and 3/8" lock washer. Run one 3/8" x 4" bolt through each side of the seat adaptor and then through the seat support.
3. Bolt the seat adaptor into place on each side with a 1 1/2" x 1" backing plate, 3/8" lock washer and 3/8" nut.

*continued on next page*

 **WARNING** Failure to follow these instructions can result in property damage, personal injury or even death.

 1-800-669-9690

# SEAT ADAPTOR KIT #88241 INSTALLATION INSTRUCTIONS



85-2890-01 02-08

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

ROADMASTER, Inc. 6110 NE 127th Ave. Vancouver, WA 98682 1-800-669-9690 fax 360-735-9300 www.roadmasterinc.com

continued from preceding page



## Instructions for 2008 Chevy Equinox Sport

- 1.** Before installing the seat adaptor, the mounting post (that was included with your BrakeMaster system) must be removed from the round plate (Fig.1). Secure the round plate in a vise. Use a wrench to loosen the mounting post, while holding the bolt with an Allen wrench. Don't try to turn the Allen bolt with the Allen wrench, as you might damage the wrench or bolt. Use a 1/2" open-end wrench to twist the mounting post off.
- 2.** Then, secure the mounting post to the center of the seat adaptor, using the included 3/4" x 3/8" bolt and 3/8" lock washer.
- 3.** Remove the driver's side seat track cover by removing two T20 Torx screws (Fig.4).
- 4.** Pull forward and out to remove the seat track. Trim, using the white line in Figure 5 as a guide.
- 5.** Run one 3/8" x 4" bolt through each side of the seat adaptor and then through the seat support.



**WARNING**

Failure to follow these instructions can result in property damage, personal injury or even death.