




SEAT ADAPTER KIT #88241 INSTALLATION INSTRUCTIONS



2890-04

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

ROADMASTER, Inc. 6110 NE 127th Ave. Vancouver, WA 98682 360-896-0407 fax 360-735-9300 www.roadmasterinc.com

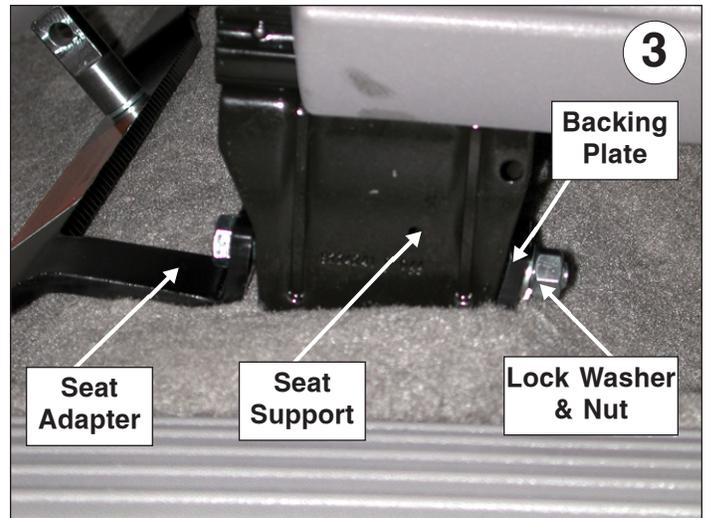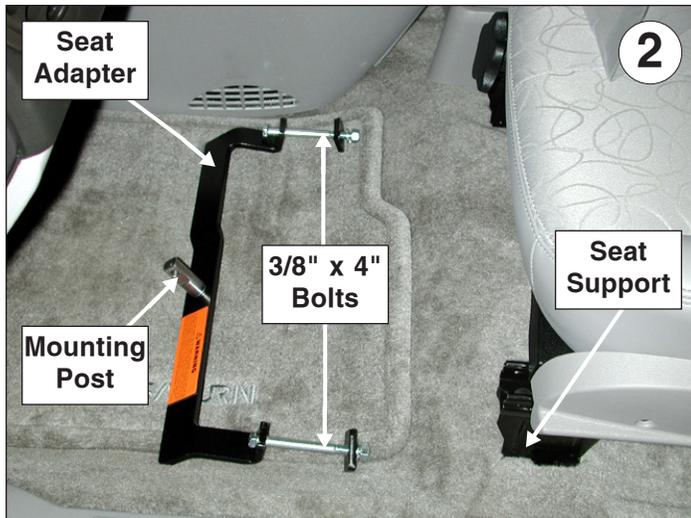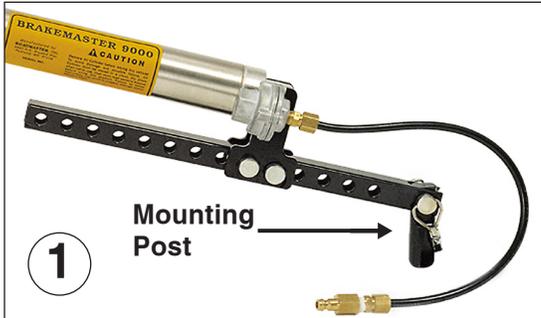

Parts List

- (3) 3/8" Lock washers
- (1) 3/8" x 3/4" bolt
- (2) 3/8" Nuts
- (2) 4" x 3/8" Bolts
- (2) 1 1/2" x 1" Backing plates

CAUTION

Once the seat adapter has been installed, carefully run the seat through its full range of motion. If it is impeded in any way, immediately stop and correct the interference. Failure to do so may result in non-warranty property damage.

Instructions for 2004 Saturn

- 1.** Locate the mounting post (Fig.1) that came with your Brake-Master. If needed, order part number 450596. Now, secure the post to the center of the seat adapter using the included 3/8" x 3/4" bolt and 3/8" lock washer. If the hole is countersunk, use the Allen head bolt and lock washer included with this kit.
- 2.** Then, secure the mounting post to the center of the seat adapter, using the included 3/4" x 3/8" bolt and 3/8" lock washer. Run one 3/8" x 4" bolt through each side of the seat adapter and then through the seat support.
- 3.** Bolt the seat adapter into place on each side with a 1 1/2" x 1" backing plate, 3/8" lock washer and 3/8" nut.

continued on next page



WARNING

Failure to follow these instructions can result in property damage, personal injury or even death.

SEAT ADAPTER KIT #88241 INSTALLATION INSTRUCTIONS



2890-04

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

ROADMASTER, Inc. 6110 NE 127th Ave. Vancouver, WA 98682 360-896-0407 fax 360-735-9300 www.roadmasterinc.com

continued from preceding page



Instructions for 2008 Chevy Equinox Sport

1. Secure the mounting post (Fig.1) to the center of the seat adapter using the included 3/8" x 3/4" bolt and 3/8" lock washer. If your seat adapter has a countersunk hole, you must use the Allen head bolt and lock washer included with this kit.
2. Then, secure the mounting post to the center of the seat adapter, using the included 3/8" x 3/4" bolt and 3/8" lock washer.
3. Remove the driver's side seat track cover by removing two T20 Torx screws (Fig.4).
4. Pull forward and out to remove the seat track. Trim, using the white line in Figure 5 as a guide.
5. Run one 3/8" x 4" bolt through each side of the seat adapter and then through the seat support.



WARNING

Failure to follow these instructions can result in property damage, personal injury or even death.