




SEAT ADAPTOR KIT #88252 INSTALLATION INSTRUCTIONS



3866-01

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE


ROADMASTER, Inc. 6110 NE 127th Ave. Vancouver, WA 98682 1-800-669-9690 fax 360-735-9300 www.roadmasterinc.com

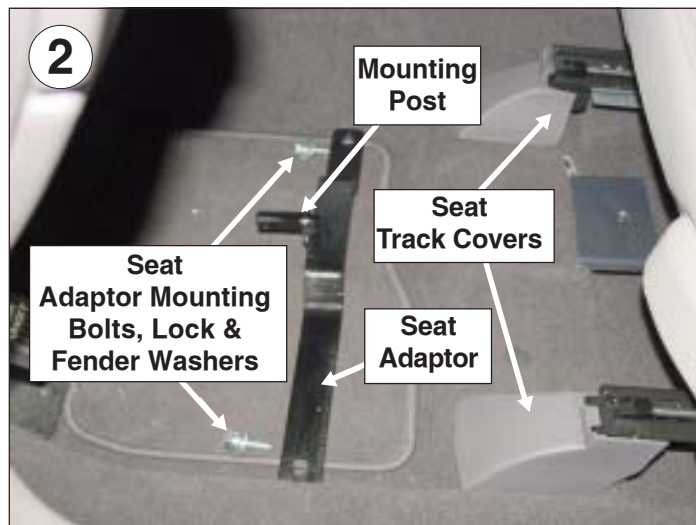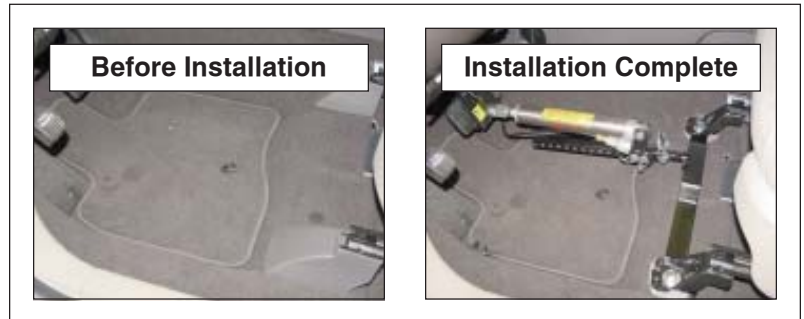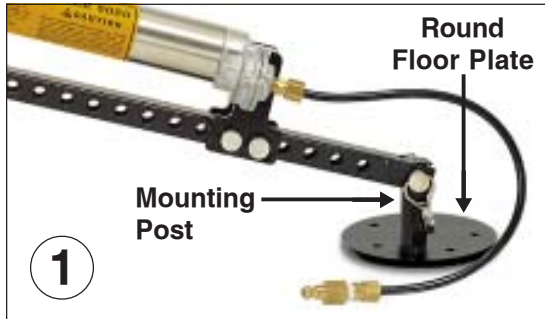

- ## Parts List
- (1) 3/8" lock washer
 - (1) 3/8" x 3/4" bolt
 - (2) 10mm x 1.5 x 30mm
 - (2) 10mm lock washer
 - (2) 10mm fender washer

Instructions

1. Before installing the seat adaptor, the mounting post (that was included with your BrakeMaster system) must be removed from the round plate (Fig.1). First, secure the round plate in a vise. Use a wrench to loosen the mounting post, while holding the bolt with an Allen wrench. Don't try to turn the Allen bolt with the Allen wrench, as you might damage the wrench or bolt. Use a 1/2" open-end wrench to twist the mounting post off. Then, secure the mounting post to the center of the seat adaptor, using the included 3/8" x 3/4" bolt and 3/8" lock washer.
2. Remove the two front seat track covers and the two front 13mm (head) seat track bolts. Then, slide the seat all the forward to gain access to the rear seat track bolts. Next, loosen both of the rear seat track bolts to allow the front of the seat to be lifted slightly and the seat adaptor to be placed between the floor and the seat tracks. Once in position, bolt into place using the supplied 10mm x 1.5 x 30mm bolts, lock washers and fender washers.

 **WARNING** Failure to follow these instructions can result in property damage, personal injury or even death.