


# SEAT ADAPTOR KIT #88254 INSTALLATION INSTRUCTIONS




Part# 3880

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

ROADMASTER, Inc. 6110 NE 127th Ave. Vancouver, WA 98682 1-800-669-9690 fax 360-735-9300 www.roadmasterinc.com

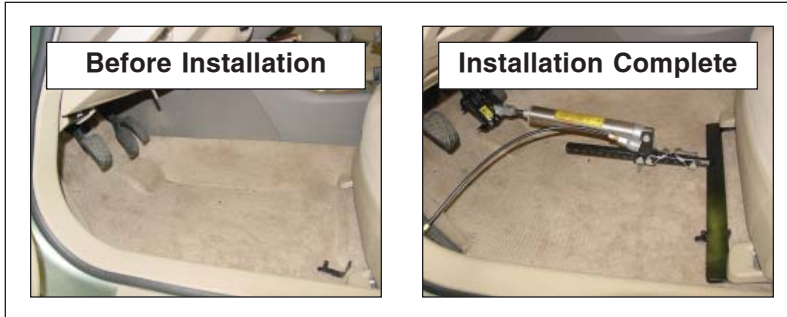

- ### Parts List
- (2) 10mm x 1.25 x 40mm
  - (2) 10mm lock washer
  - (2) 10mm fender washer

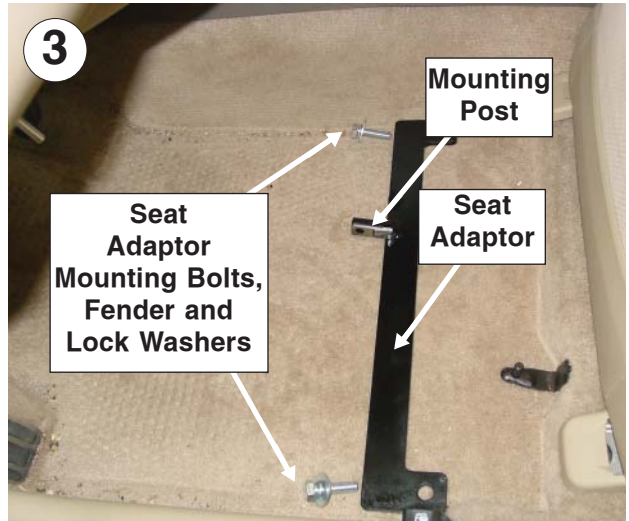

## Instructions

1. Remove the front seat track covers and the two front 14mm (head) seat track mounting bolts. Then, move the seat all the way forward and remove the rear seat track covers and loosen the two T50 Torx bolts.
2. Now, die grind a small section of the front half of the bolt opening to allow clearance vfor the bolt once the seat adaptor is placed underneath the seat tracks.
3. Place the adaptor between the floor and the seat tracks, bolt into place using the supplied 10mm x 1.25 x 40mm bolts, fender washers and lock washers.
4. Tighten the rear seat bolts and replace the covers for the front and rear seat tracks.

 **WARNING** Failure to follow these instructions can result in property damage, personal injury or even death.