



# SEAT ADAPTOR KIT #88261 INSTALLATION INSTRUCTIONS



4022-01

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

ROADMASTER, Inc. 6110 NE 127th Ave. Vancouver, WA 98682 1-800-669-9690 fax 360-735-9300 www.roadmasterinc.com

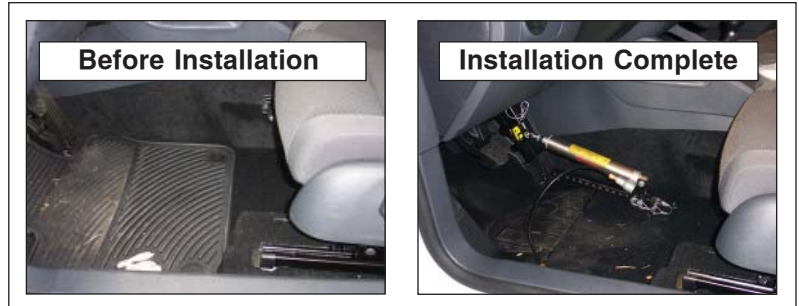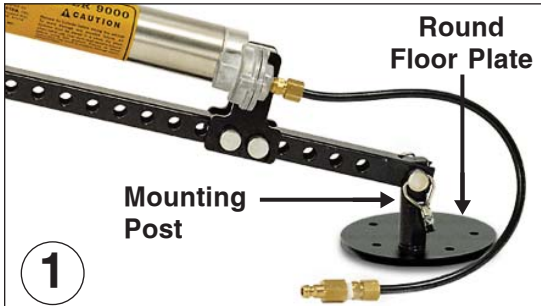

## Parts List

- (1) 3/8" x 3/4" bolt
- (1) 3/8" lock washer

## Instructions

1. Before installing the seat adaptor, the mounting post (which was included with your BrakeMaster system) must be removed from the round plate (Fig.1). First, secure the round plate in a vise. Use a wrench to loosen the mounting post, while holding the bolt with an Allen wrench. Don't try to turn the Allen bolt with the Allen wrench, as you might damage the wrench or bolt. Use a 1/2" open-end wrench to twist the mounting post off. Then, secure the mounting post to the center of the seat adaptor using the included 3/8" x 3/4" bolt and 3/8" lock washer.
2. Using a 10mm 12 point male serrated wrench, remove the two front seat track bolts (Fig.2).
3. Place the seat adaptor between the floor and the seat tracks and replace the bolts. *Note:* the mounting post on the adaptor must face the floorboard of the vehicle and be positioned so that it (Fig.1) is directly in line to the brake pedal. The BrakeMaster air cylinder may jam or function incorrectly if the mounting post is not directly in line with the brake pedal.
4. Attach the air cylinder to the adaptor.



**WARNING**

Failure to follow these instructions can result in property damage, personal injury or even death.