



# SEAT ADAPTER KIT #88296 INSTALLATION INSTRUCTIONS



4754-03

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

ROADMASTER, Inc. 6110 NE 127th Ave. Vancouver, WA 98682 360-896-0407 fax 360-735-9300 www.roadmasterinc.com

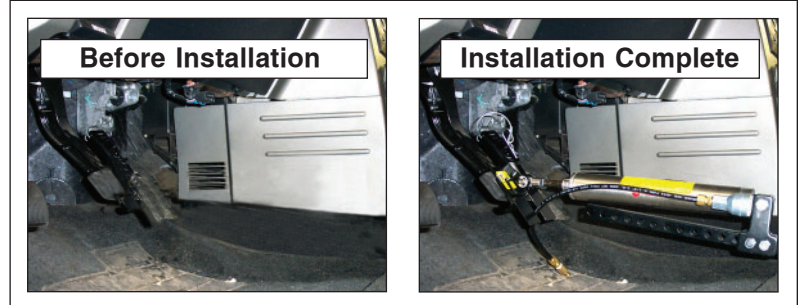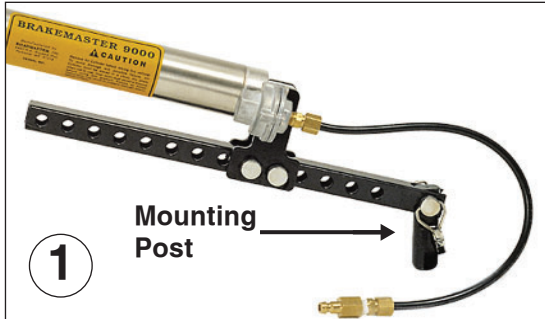

## Instructions



**1.** Locate the mounting post (Fig.1) that came with your BrakeMaster. If needed, order part number 450596. Now, secure the post to the center of the seat adapter using the included 3/8" x 3/4" bolt and 3/8" lock washer. If the hole is countersunk, use the Allen head bolt and lock washer included with this kit.



**2.** Remove the two 15mm (head) front seat track bolts (Fig.2).

**3.** For '09 and later Ford F-150 models: proceed to steps 5 through 7. For all other models: Place 1" x 3/4" pipe spacers over the seat track (Fig.3) and place the seat adapter over the pipe spacers. Note: position the adapter so that the mounting post (Fig.1) is directly in line to the brake pedal. The BrakeMaster air cylinder may jam or function incorrectly if the mounting post is not directly in line with the brake pedal.



**4.** Bolt the seat adapter into place using the 12mm x 1.25 x 50mm bolts and 12mm lock washers (Fig.4). Now, attach the air cylinder to the seat adapter.

**5.** For '09 and later Ford F-150 models: Remove the rear seat track covers (Fig.5) and loosen the seat track bolts.

## Parts List

- |                              |                       |
|------------------------------|-----------------------|
| (1) 3/8" lock washer         | (2) 12mm lock washers |
| (1) 3/8" x 3/4" bolt         | (2) 3/4" pipe spacers |
| (2) 12mm x 1.75 x 50mm bolts |                       |



**WARNING**

Failure to follow these instructions can result in property damage, personal injury or even death.



1-800-669-9690

## SEAT ADAPTER KIT #88296 INSTALLATION INSTRUCTIONS



4754-03

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

ROADMASTER, Inc. 6110 NE 127th Ave. Vancouver, WA 98682 360-896-0407 fax 360-735-9300 www.roadmasterinc.com



**6.** Place the seat adapter between the floor and the front seat tracks. Replace the hardware from step 2 and re-tighten the rear seat track bolts.

**7.** Now, attach the air cylinder to the seat adapter.



**WARNING**

Failure to follow these instructions can result in property damage, personal injury or even death.