



Rear Anti-Sway Bar Kit INSTALLATION INSTRUCTIONS

KIT# 1209-159

03/25
RS

ROADMASTER, Inc.


6110 NE 127th Ave.

Vancouver, WA 98682

360-896-0407

www.RoadmasterInc.com

For 2022 - 2025 Freightliner Supercoach XL
(57 Pass., 45' Shuttle Bus)

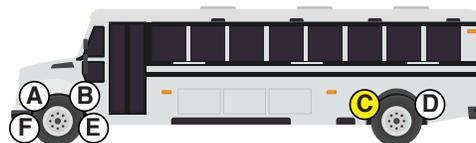

WARNING

Failure to follow these instructions can result in property damage, personal injury or even death.

- If raising the vehicle to install the anti-sway bar, always support the vehicle with jack stands at both frame rails or at the rear axle before working underneath. Ensure that the jack stands are securely positioned, and are rated at or above the weight of the vehicle.
- The installer must read the instructions and use all bolts and parts supplied. Use only the parts supplied by ROADMASTER to install this kit.
- Minor modifications are sometimes necessary due to slight vehicle variations, even for the same year, make and model.
- Regardless of year, make and model, a wide range of options for specific applications may or may not interfere with the installation. It is the installer's responsibility to make certain that equipment is not damaged once the suspension solution travels through the full range of motion. Failure to ensure adequate clearance could result in non-warranty property damage, personal injury or even death.

- If running changes were made by the manufacturer after this kit was designed, there may be weldments, braces, gussets, or other structural items which interfere with the installation. It is the installer's responsibility to allow for these running changes without sacrificing the structural integrity of the anti-sway bar. Failure to securely fasten the anti-sway bar could result in property damage, personal injury or even death.
- ROADMASTER will not be responsible for any damage or injury resulting from any modification or alteration.
- Check ALL the fasteners for tightness before and after road testing the vehicle.
- Do not use this document for custom fabrication, as it may not show all parts or structural components.
- Do not use an air impact wrench when re-installing bolts, as stripped threads may result.
- This anti-sway bar is only warranted for the original installation. Installing a used anti-sway bar on another vehicle is not recommended and will void the warranty.

Information:

Thank you for purchasing this rear anti-sway bar kit. This kit is designed to improve the handling characteristics of the Freightliner Supercoach XL; by reducing the body roll and balancing the weight transfer during cornering.

The anti-sway bar kit is engineered for long life and trouble-free performance. For maximum suspension control, use this kit along with our shock absorbers and our front anti-sway bar kit. All the hardware needed for installation is included in this kit. Refer to the PARTS LIST in these instructions to identify the parts.

Before starting the installation, lay out the kit components in order, as they will be used. This will give you a visual idea of how the components work, and will also confirm that everything is present and accounted for.



BOLT TORQUE REQUIREMENTS

Note: The torque values represented below are intended as general guidelines. Torque requirements for specific applications may vary. Roadmaster does not warrant this information to be accurate for all applications and disclaims all liability for any claims or damages which may result from its use.

STANDARD BOLTS

Thread Size	Grade	Torque
5/16-18	5	13 ft./lb.
3/8-16	5	23 ft./lb.
7/16-14	5	37 ft./lb.
1/2-13	5	57 ft./lb.
5/8-11	5	112 ft./lb.

METRIC BOLTS

Thread Size	Grade	Torque
6mm-1.0	8.8	6 ft./lb.
8mm-1.0	8.8	18 ft./lb.
8mm-1.25	8.8	16 ft./lb.
10mm-1.25	8.8	36 ft./lb.
10mm-1.5	8.8	31 ft./lb.

METRIC BOLTS

Thread Size	Grade	Torque
12mm-1.25	8.8	64 ft./lb.
12mm-1.5	8.8	60 ft./lb.
12mm-1.75	8.8	55 ft./lb.
14mm-2.0	8.8	88 ft./lb.



Rear Anti-Sway Bar Kit

INSTALLATION INSTRUCTIONS

KIT# 1209-159

03/25
RS

ROADMASTER, Inc.

6110 NE 127th Ave.

Vancouver, WA 98682

360-896-0407

www.RoadmasterInc.com


What You'll Need

Sockets and Wrench
General Hand tools
Threadlocker (Preferable Red)
Second Person to Help

About this kit

1-3/4" diameter
Fits most 2025 Freightliner Supercoach XL (57 Pass., 45")
Note: Inspect the vehicle's U-bolts that will be reused in the installation of this kit. Consider replacing them, if they are rusty or show other signs of structural wear.

Need Help? Call Toll-Free
 1-800-669-9690

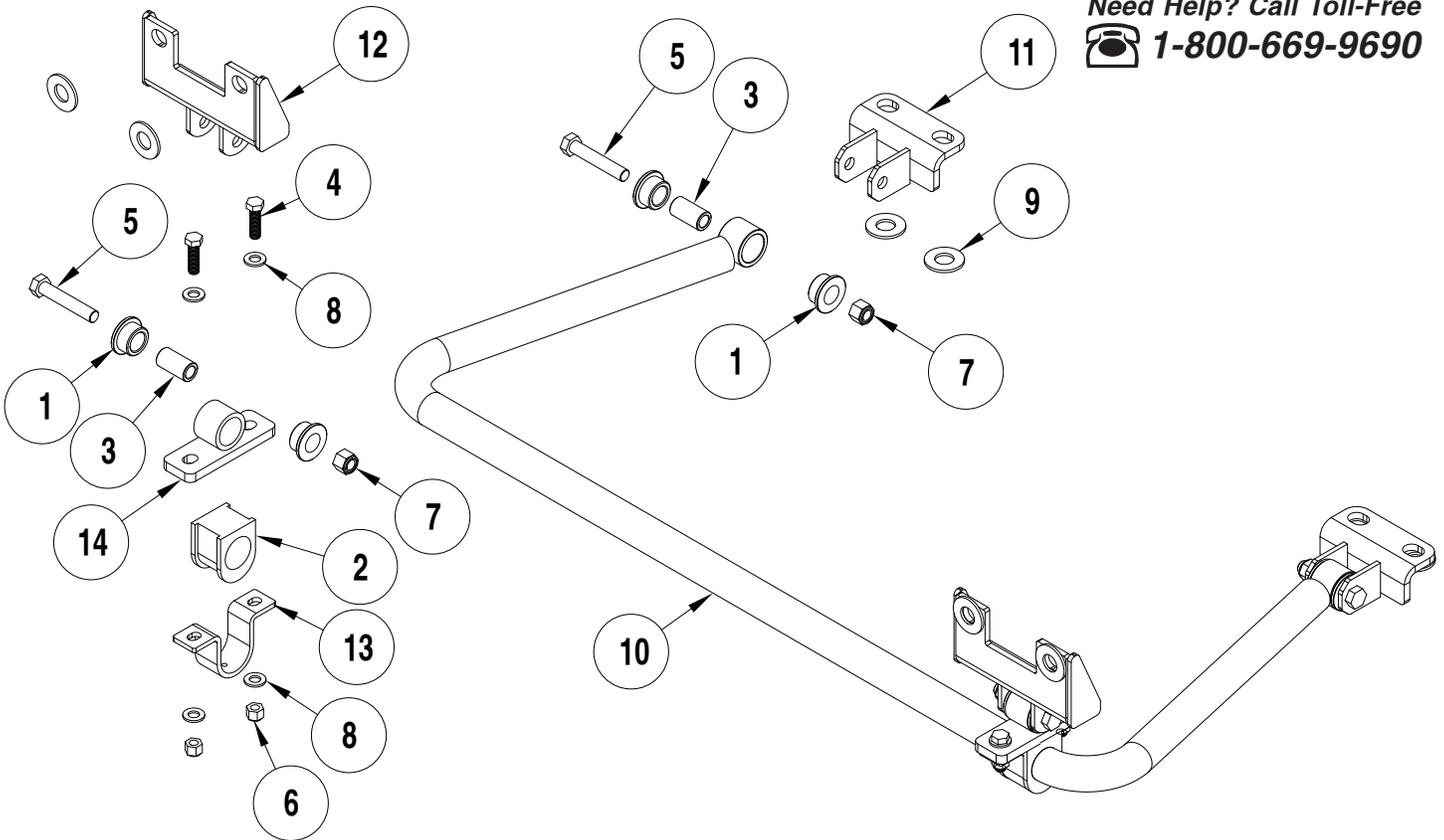

ITEM	QTY.	DESCRIPTION	PART
1	8	BUSHING	205209-00
2	2	BUSHING	205220-20
3	4	BUSHING SLEEVE	205503-00
4	4	1/2-13 x 1 3/4" BOLT - GRADE 8	350096-80
5	5	5/8-11 x 3 1/2" BOLT - GRADE 8	350156-00
6	4	1/2-13 NYLON INSERT LOCK NUT	350259-00
7	4	5/8-11 NYLON INSERT LOCK NUT	350263-00
8	8	1/2" HARDENED WASHER	350308-80
9	8	7/8" FLAT WASHER	350324-10
10	1	ANTI-SWAY BAR	580651-00
11	2	BRACKET	B1163
12	2	BRACKET	B1164
13	2	BUSHING CLAMP	B141
14	2	END LINK	B661
15	1	AQUALUBE	400011-30
16	1	THREADLOCKER	200544-00

Important: All illustrations and specifications contained herein are based on the latest information available at the time of publication approval. ROADMASTER, INC. reserves the right to make changes at any time without notice in material, specification and models or to discontinue models.



Rear Anti-Sway Bar Kit INSTALLATION INSTRUCTIONS

KIT# 1209-159

03/25
RS

ROADMASTER, Inc.

6110 NE 127th Ave.

Vancouver, WA 98682

360-896-0407

www.RoadmasterInc.com

Installation:


1. From the driver's side, support the control arm behind the axle with tremendous upward force using a five ton, or greater, jack. The air bag will start to compress, which is to be expected (Fig.B).

2. Locate the supplied B1164 brackets and related assembly hardware as indicated in the diagram on page two; and install them to the slipper spring frame horn at this time using provided hardware. Leave the assembly finger tight for now (Fig.C).

3. Attach the anti-sway bar onto the endlink mounted bushings using the provided hardware.

4. Remove all four 1-5/16" U-bolt nuts on the driver's side.

Note: All four must be removed for proper installation. Inspect the vehicle's U-bolts. Roadmaster advises

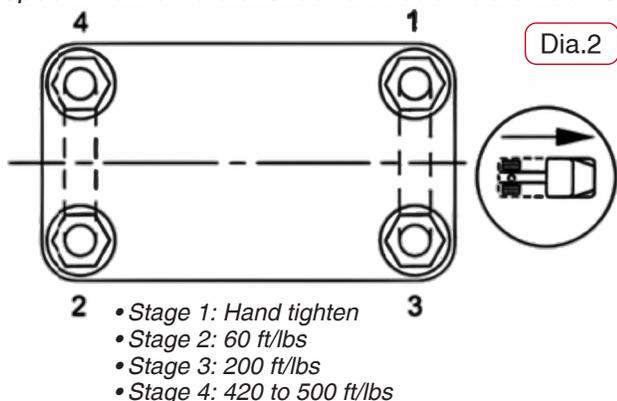

considering the replacement of U-bolts that are rusty or show other signs of structural wear.

5. Attach onto the exposed frame the B1163 bracket and 7/8" flat washer using the existing U-bolts (Fig.D).

6. Replace the U-bolt nuts and then use the following four-stage torquing procedure to properly tighten the nuts in the sequence shown in diagram 2.

continued on next page...

WARNING

The anti-sway bar is heavy, and may cause property damage or personal injury if it falls on equipment, engine components or any part of your body. Ensure that the anti-sway bar is supported and that you are out of the way when removing the brackets.

Failure to follow these instructions may cause property damage, personal injury or even death.

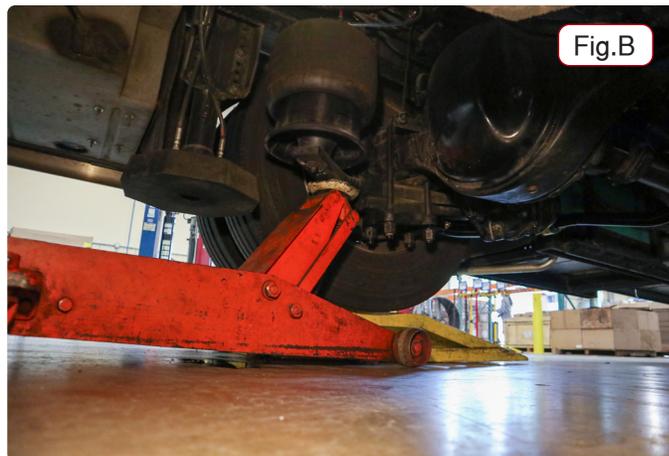


Fig.B



Fig.C

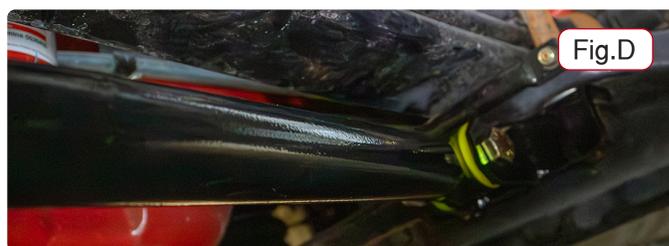


Fig.D

WARNING

The anti-sway bar is not a load-bearing component!

Do not tow or hoist the vehicle using the anti-sway bar or its mounting brackets as attachment points. The anti-sway bar is not designed to carry the weight of the vehicle and may collapse, which will damage the anti-sway bar components, the suspension, or other components. The vehicle will detach or fall, which may cause severe personal injury.

Failure to follow the instructions in this packet and the warnings therein may result in property damage, personal injury or even death.



Rear Anti-Sway Bar Kit INSTALLATION INSTRUCTIONS

KIT# 1209-159

03/25
RS

ROADMASTER, Inc.

6110 NE 127th Ave.

Vancouver, WA 98682

360-896-0407

www.RoadmasterInc.com

...continued from last page

7. Swing the ends of the anti-sway bar up to the newly installed axle brackets. Attach the bar to the brackets using 5/8-11" x 3 1/2" bolts, bushing, bushing sleeve, and 5/8-11 lock nut, as indicated on page 2 diagram.

8. Repeat the relevant prior steps for the passenger's side of the vehicle.

Note: Use Threadlocker on the nuts and bolts of the assembly.

9. Recheck all fasteners and then test drive. Recheck fasteners after the test drive.

WARNING

After road testing, re-check all fasteners for proper tightness – if a fastener has worked loose or fallen off, re-tighten or replace it. Without all kit components properly tightened or in place, the anti-sway bar will not stabilize the vehicle at full capacity, which may cause reduced cornering ability or other reductions in vehicle handling or performance.

Failure to follow these instructions may cause property damage, personal injury or even death.