




# BASEPLATE KIT INSTALLATION INSTRUCTIONS

**KIT# 495-1A**

12/12/13  
KS

ROADMASTER, Inc. 6110 NE 127th Ave. Vancouver, WA 98682 360-896-0407 fax 360-735-9300 www.roadmasterinc.com

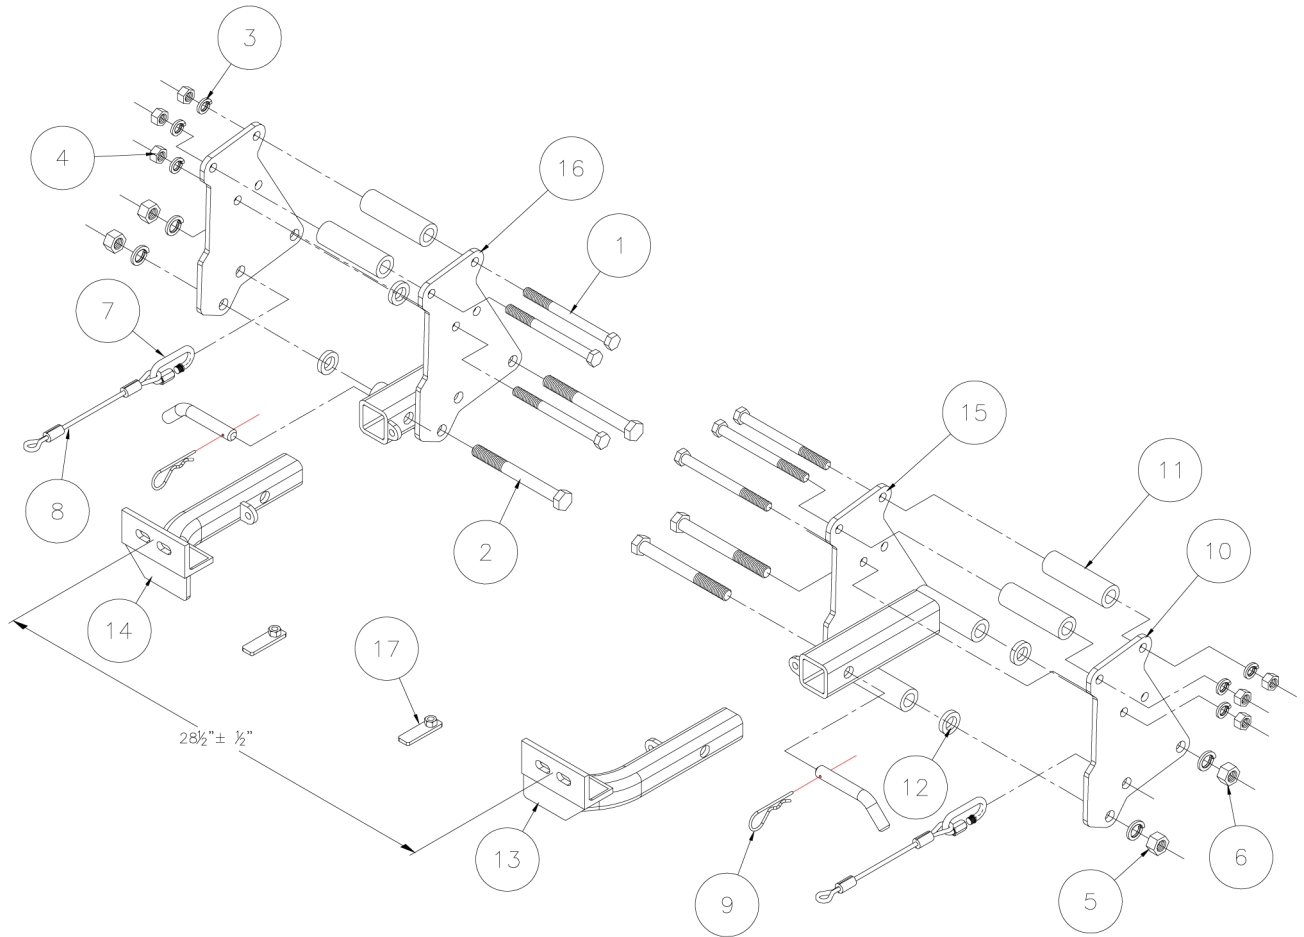

ITEM	QTY	NAME	MATERIAL
1.....	6	1/2" x 6" BOLT.....	350109-00
2.....	4	5/8" x 6" BOLT.....	350162-00
3.....	6	1/2" LOCK WASHER.....	350309-00
4.....	6	1/2" NUT.....	350258-00
5.....	4	5/8" LOCK WASHER.....	350313-00
6.....	4	5/8" NUT.....	350262-00
7.....	2	QUICK LINK.....	200008-00
8.....	2	SAFETY CABLE 15".....	650648-15
9.....	2	DRAW PIN/SPRING PIN.....	357035-00
10.....	2	MOUNTING PLATE.....	A-001277
11.....	4	1 1/4" O.D. x 4 1/4" PIPE SPACER.....	A-001278
12.....	4	1 1/4" O.D. x 1/4" PIPE SPACER.....	A-002726
13.....	1	DRIVER SIDE ARM.....	C-000764
14.....	1	PASSENGER SIDE ARM.....	C-000765
15.....	1	DRIVER SIDE RECEIVER.....	C-000766
16.....	1	PASSENGER SIDE ARM.....	C-000767
17.....	2	3/16" x 3/4" x 2 1/2" THREADED BACKING PLATE.....	C-002002



# BASEPLATE KIT INSTALLATION INSTRUCTIONS

**KIT# 495-1A**

12/12/13  
KS

ROADMASTER, Inc. 6110 NE 127th Ave. Vancouver, WA 98682 360-896-0407 fax 360-735-9300 www.roadmasterinc.com

This bracket kit is one of our XL series, which allows you to remove the most visual portion of the bracket (Fig.A). The kit consists of two receiver braces, two front braces and a hardware pack. The receiver braces are designed to mount to the frame tubes on each side in place of the existing tow hooks. Start by laying out the kit as illustrated to check parts and placement of parts.



**IMPORTANT:** All baseplates **must** be assembled with all the bolts left loose for final adjustment and positioning (before tightening) unless otherwise instructed. All bolts **must** be torqued for proper strength. If more than one bolt is used per fastening point, the diagram may only show one. Use flat washers over all slotted holes and lock washers on all fasteners.

## WARNING

Failure to heed these warnings or follow the installation instructions may result in a voided warranty, loss of towed vehicle, personal injury or death.

- Do not weld or modify this baseplate or its components. Welding or modification will void the warranty.
- Do not use this document as a basis to design/fabricate a baseplate, as it may not show all parts or structural components.
- We strongly recommend professional installation.
- If the towed vehicle has been in an accident, it must be properly repaired before attaching the baseplate. Do not install the baseplate if any structural frame damage is found.
- The installer must use all bolts and parts supplied. If running changes were made by the vehicle manufacturer after this kit was designed, some bolts or other fasteners may no longer be the correct size. It is the installer's responsibility to verify this kit is securely fastened to the vehicle.
- Use Loctite® Red on all bolts used to secure this baseplate. Torque all bolts to the specifications found at the end of these instructions. Do not over-torque the bolts or failure may occur.
- The installer must inspect the baseplate to ensure adequate clearance, particularly around hoses, air conditioner lines, radiators, etc. or non-warranty failure may result.
- Roadmaster manufactures many styles of baseplates. If your baseplate has removable arms, they must be removed before driving the vehicle, unless the arms can be pinned or padlocked in place. If not secured, the arms could vibrate out.
- Some motorhome chassis have such a tight turning radius that you can damage your motorhome, towed vehicle, tow bar or baseplate while turning sharply. Before getting on the road, test your turning radius in an empty parking lot. Turning too sharply could result in non-warranty damage to your towing system, motorhome and/or towed vehicle.
- Do not back up with the towed vehicle attached or non-warranty damage will occur to your towing system or vehicles.
- The safety cables must connect the towing vehicle to the towed vehicle frame to frame, with the cables crossed, with enough slack for sharp turns. See cable instructions for proper routing. Failure to do so will result in non-warranty damage and/or the loss of the towed vehicle.
- This kit is designed for use with ROADMASTER tow bars and ROADMASTER adapters only. Using this kit with other brands, without an approved ROADMASTER adapter, may result in non-warranty damage or injury.
- Receiver extensions and out-of-level towing situations of 3 inches or more. This can cause the system to swing much higher and lower, causing excessive strain on the tow bar, baseplate and frame. That can cause the towing system to fail, causing property damage, personal injury or even death. If you must use a receiver extension or drop hitch to tow, it will reduce your receiver's weight capacity by 1/3 to avoid damaging your system. Never use more than one extension and/or drop hitch, as this will void your warranty.
- Every 3,000 miles, the owner must inspect all mounting points for cracks or fatigue, and check the fasteners for proper torque, according to the bolt torque requirements chart on the last page of these instructions.
- The owner must follow the vehicle manufacturer's instructions to prepare the vehicle for towing. Failure to do so may cause severe damage to the vehicle.
- This baseplate is only warranted for the original installation. Installing a used baseplate on another vehicle is not recommended and will void the warranty.






# BASEPLATE KIT INSTALLATION INSTRUCTIONS

**KIT# 495-1A**

12/12/13  
KS

ROADMASTER, Inc. 6110 NE 127th Ave. Vancouver, WA 98682 360-896-0407 fax 360-735-9300 www.roadmasterinc.com

For 2004-2008 Ford F150 models without tow hooks, follow steps 1 through 3, then on to step 13. For sport models, start with step 4, then on to step 13. For 2009 and later Ford F150 models, begin with step 13. If your vehicle is equipped with tow hooks, start with step 5. For the 2006 Lincoln Mark LT, refer to Figures AA and BB on page 6 for the fascia trimming only, then on to step 13.

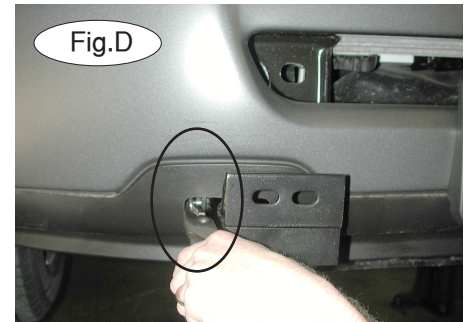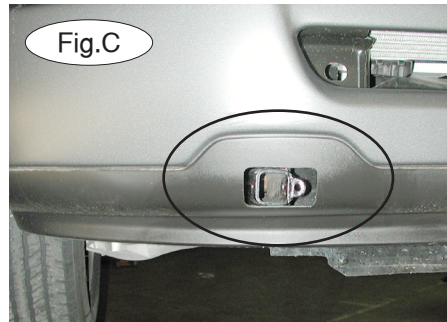
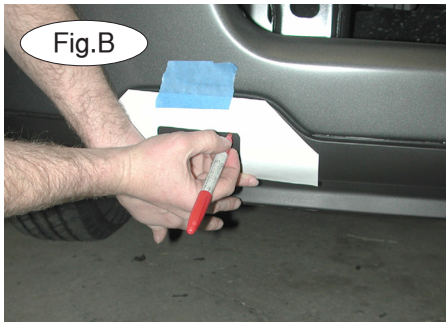


1. **Important:** please use all supplied bolts and parts and read all instructions carefully before beginning this installation. The majority of questions you may have can be answered within the text, and proper installation will ensure safe and secure travel. Now, begin the installation. Cut out the provided F-150 template on the second to last page of these instructions.

2. Tape the template to the fascia, referring to Figure B for correct placement. Now, trace the opening as a guide for correct trimming.


3. Using a reciprocating saw or die grinder, cut along the line you marked in the previous step (Fig.C). Proceed to step 6 to complete the installation.

*Note:* you will need pliers to insert the spring pin (Fig.D), or you can cut the hole in the lower fascia larger to allow access to the pin without the pliers.

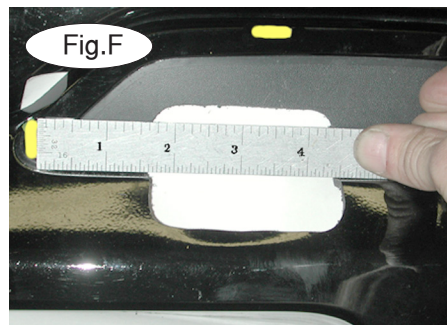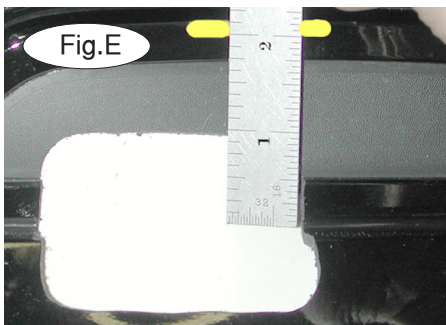

4. On each side, measure approximately 2" down from the top of the trim line (Fig.E), and 3/4" from the side (Fig.F), using the yellow marker lines as a reference. Drill a 1/2" pilot hole at this point. Enlarge the opening with a die grinder, using the receiver brace directly below as a reference, until the opening is large enough for the removable front brace (Fig.G).

5. Remove the tow hooks on each side by removing two front bolts and loosening the rear bolts (Fig.H). Slide the hooks back off the rear bolt (Fig.I). *Note:* on models without tow hooks, there will be no front bolts to replace.

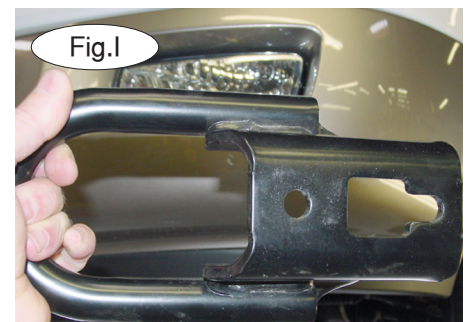






# BASEPLATE KIT INSTALLATION INSTRUCTIONS

**KIT# 495-1A**




12/12/13  
KS

ROADMASTER, Inc. 6110 NE 127th Ave. Vancouver, WA 98682 360-896-0407 fax 360-735-9300 www.roadmasterinc.com

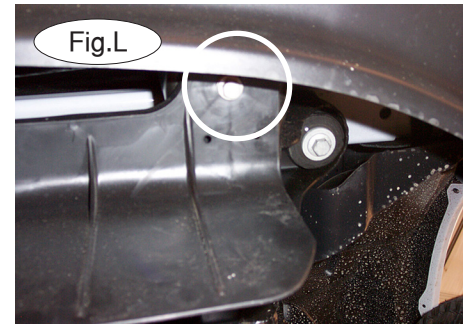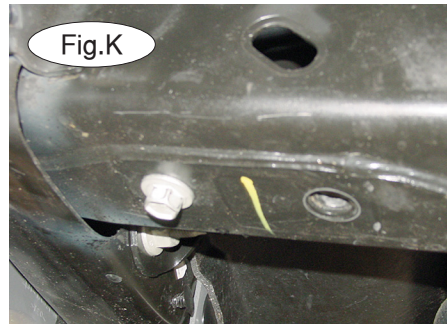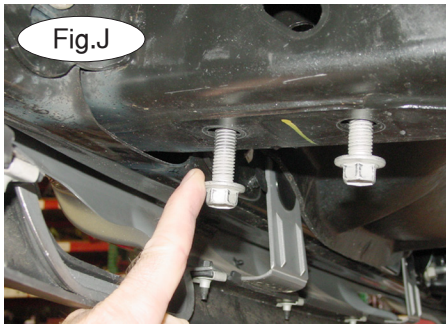

6. Now put the front bolts back in and tighten down (Fig.J), then remove the rear bolt on each side (Fig.K).




7. **For 2009 and later models:** due to manufacturing variances, some models may be equipped with a rock guard. This guard can either be removed or relocated. Remove two 13mm (head) bolts attaching the rock guard to the bottom of the frame (Fig.L – driver's side). If you are relocating this guard, proceed to step 8. If you are removing it, proceed to step 12.

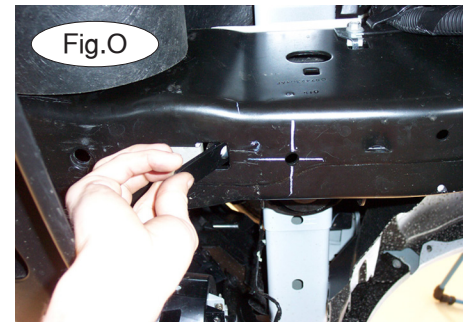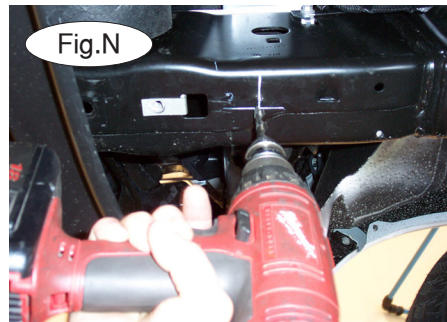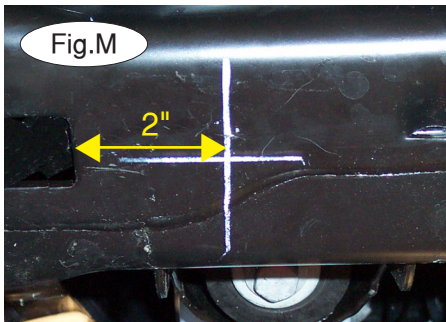

8. On each side, locate a square hole in the bottom of the frame rail. Measure 2" back from the hole, and find the center of the frame (Fig.M – passenger side).


9. On each side, use a 7/16" drill bit to drill a hole at the center point (Fig.N).

10. On each side, insert one of the supplied 3/16" x 3/4" x 2 1/2" nutted backing plates into the square hole (Fig.O) and over the hole you drilled in the previous step.

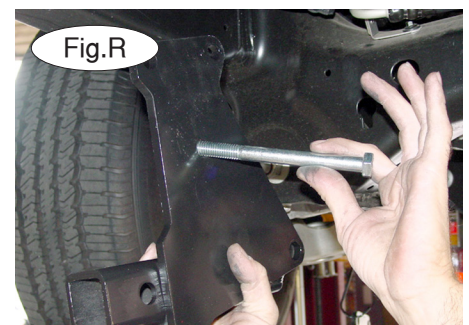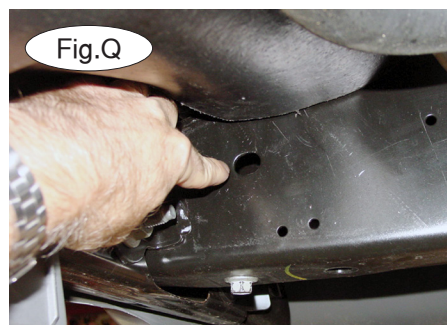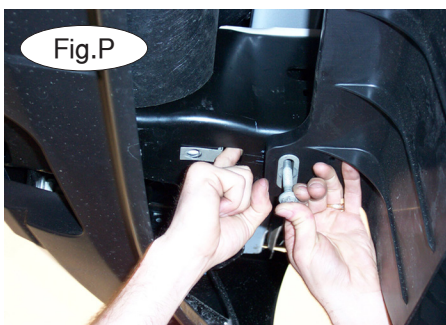

11. Hold the backing plate in place and using the bolts you removed in step 8, bolt through the rock guard, frame rail and into the backing plate (Fig.P).

12. Working on one side at a time, find the hole in the frame located above the tow hook mounting area and put a 1/2" x 6" bolt through the brace and the frame from the inside of the frame (Fig.Q,R,S). **For 2004-2008 models:** use the front hole in the side plate. **For 2009 and later models:** use the rear hole in the side plate.

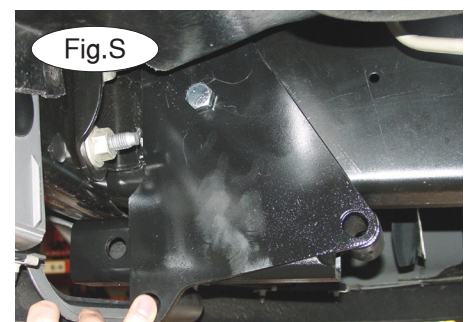






# BASEPLATE KIT INSTALLATION INSTRUCTIONS



**KIT# 495-1A**

12/12/13  
KS


ROADMASTER, Inc. 6110 NE 127th Ave. Vancouver, WA 98682 360-896-0407 fax 360-735-9300 www.roadmasterinc.com

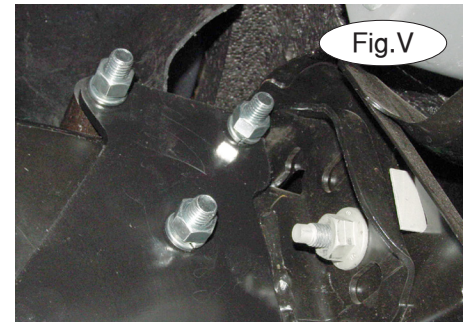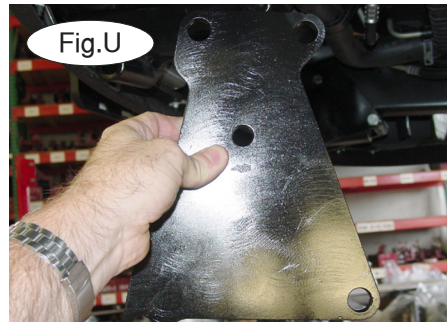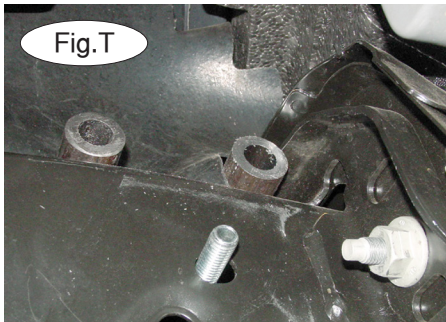

13. Put two bolts over the top of the frame then follow with two 4½" pipe spacers (Fig.T).
14. Position the outside plate (Fig.U) over the three bolts and two top spacers then secure with ½" lock washers and nuts (Fig.V).

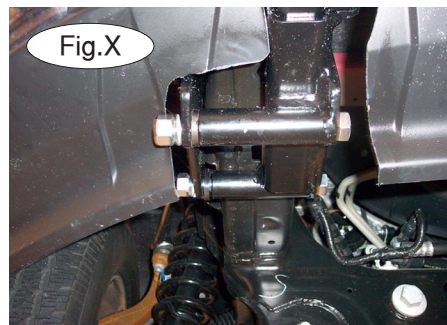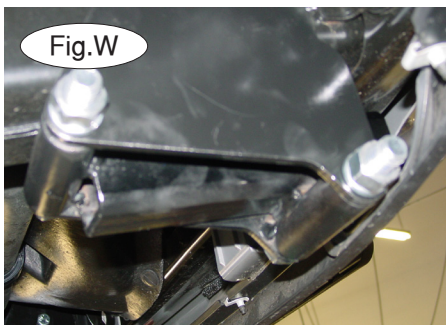

15. **For 2004-2008 models:** follow with two more 5/8" x 6" bottom bolts, lock washers and nuts (Fig.W). **For 2009 and later models:** use the supplied 1¼" x ¼" spacers between the outside plate and main receiver brace (Fig.X). Using the drawing on the first page as a reference, measure between the two front braces, ensuring that the distance is still 28" +/- ½".

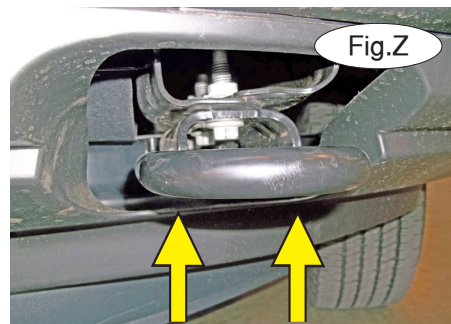

16. Repeat steps 13 through 15 for the remaining side and torque all mounting bolts to the specifications below. Recheck the measurements, to make certain this distance is still 28" +/- ½".
17. **For 2004-2008 models:** use the enclosed template to trim the fascia. **For 2009 and later models without tow hooks:** in the third recessed area of the fascia, measure ¾" inch toward the center, and index the template to the bottom of the fascia. Trace the template, and trim using the white lines in Figure Y as a guide. **For 2009 and later models with tow hooks:** trim the bottom of the tow hook opening in the area denoted with yellow arrows in Figure Z to allow clearance for the main receiver brace.
18. Insert the front braces into the receiver braces and secure with 5/8" draw pins and 3/16" safety pins.
19. Install the tow bar according to the manufacturer's instructions.
20. Attach one end of the included 15" safety cables to the lower front hole in the side mounting plate on each side of the receiver brace with the included cable connectors (quick links) (Fig.AA). Connect the other end to the tow vehicle's safety cables and the tow bar.



# BASEPLATE KIT INSTALLATION INSTRUCTIONS


**KIT# 495-1A**

12/12/13  
KS

ROADMASTER, Inc. 6110 NE 127th Ave. Vancouver, WA 98682 360-896-0407 fax 360-735-9300 www.roadmasterinc.com

## For fascia trimming on the 2006 Lincoln Mark LT, see the instructions below.

1. Cut out the provided template on the last page of these instructions.
2. Tape the template to the fascia, referring to Figure BB for correct placement. Now, trace the opening as a guide for correct trimming.
3. Using a reciprocating saw or die grinder, cut along the line you marked in the step above (Fig.CC).

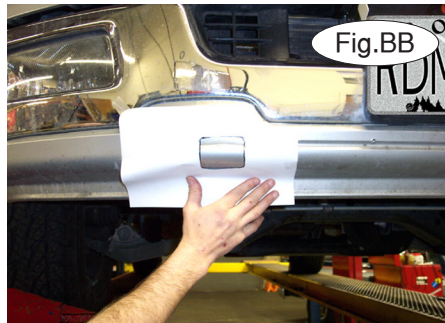

**Now, return to step 13 to finish the installation.**

### BOLT TORQUE REQUIREMENTS

Note: The torque values represented below are intended as general guidelines. Torque requirements for specific applications may vary. Roadmaster does not warrant this information to be accurate for all applications and disclaims all liability for any claims or damages which may result from its use.

#### STANDARD BOLTS

Thread Size	Grade	Torque
5/16.....	5.....	13 ft./lb.
3/8.....	5.....	23 ft./lb.
7/16.....	5.....	37 ft./lb.
1/2.....	5.....	56 ft./lb.
5/8.....	5.....	150 ft./lb.

#### METRIC BOLTS

Thread Size	Grade	Plated / Unplated
8mm-1.0 .....	8.8 .....	20 ft./lb. 18 ft./lb.
8mm-1.25 .....	8.8 .....	19 ft./lb. 18 ft./lb.
10mm-1.25 .....	8.8 .....	38 ft./lb. 36 ft./lb.
10mm-1.5 .....	8.8 .....	37 ft./lb. 35 ft./lb.

#### METRIC BOLTS

Thread Size	Grade	Plated / Unplated
12mm-1.25 .....	8.8 .....	70 ft./lb. 65 ft./lb.
12mm-1.5 .....	8.8 .....	66 ft./lb. 61 ft./lb.
12mm-1.75 .....	8.8 .....	65 ft./lb. 60 ft./lb.
14mm-2.0 .....	8.8 .....	104 ft./lb. 97 ft./lb.




# BASEPLATE KIT INSTALLATION INSTRUCTIONS

**KIT# 495-1A**


12/12/13  
KS

ROADMASTER, Inc. 6110 NE 127th Ave. Vancouver, WA 98682 360-896-0407 fax 360-735-9300 www.roadmasterinc.com

Template for 2004-2008 Ford  
F-150 fascia trimming

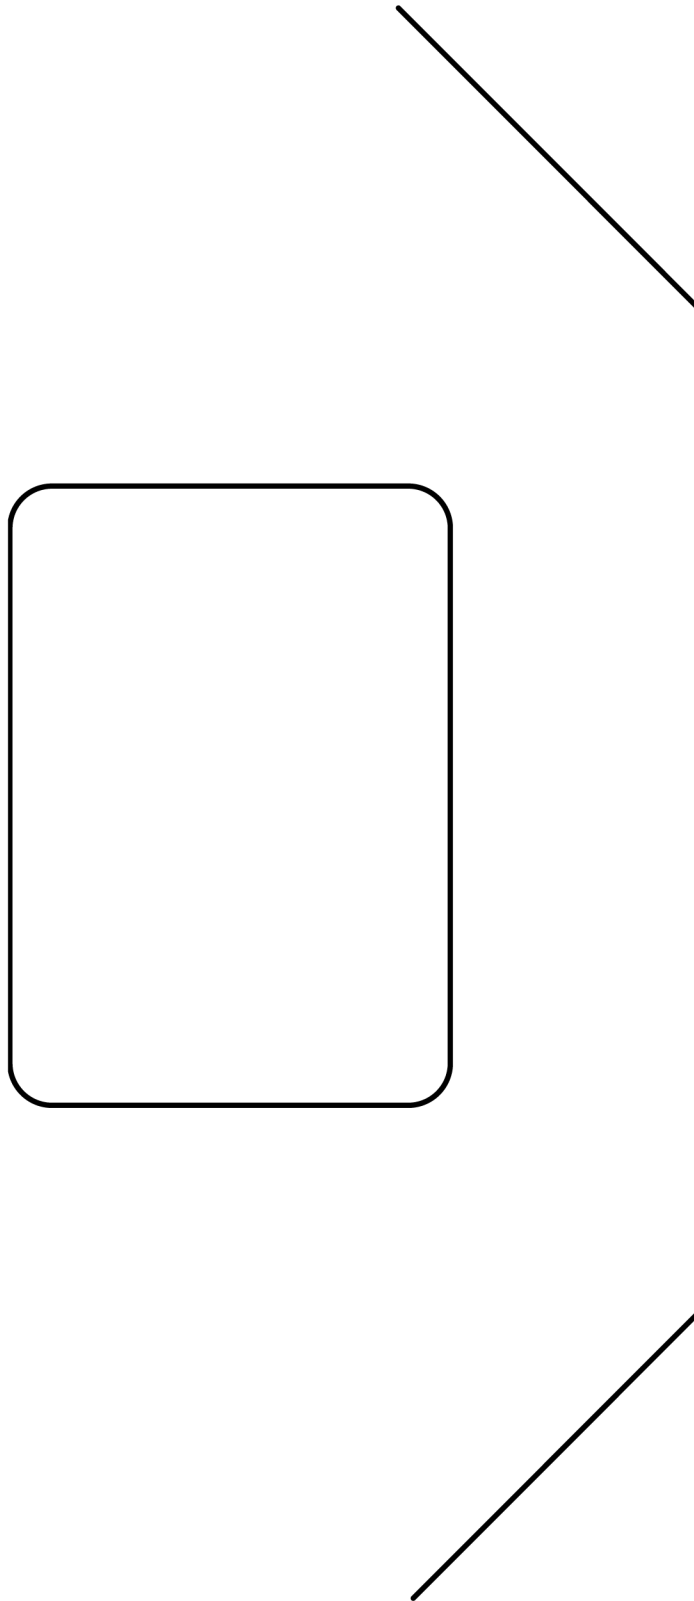

Template for Lincoln  
Mark LT fascia trimming

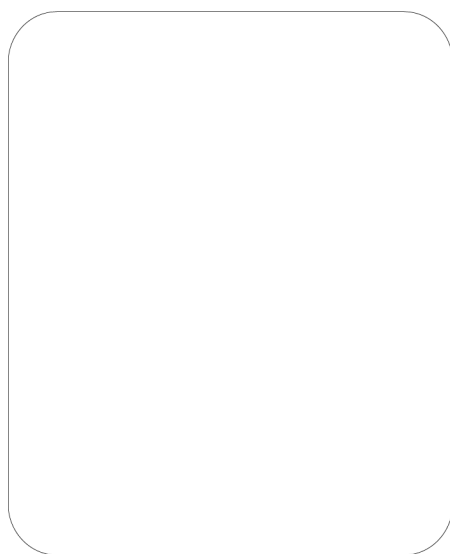

Template for 09 and later  
Ford F-150 fascia trimming

