



Towing and Suspension Solutions

854536-03 07-24

Sterling™ & Nighthawk™ handle replacement kit

for Sterling and Sterling All-Terrain tow bars
part number 910003-35

Installation instructions

All specifications are subject to change without notice.

ROADMASTER, Inc. 6110 NE 127th Ave. Vancouver, WA 98682 800-669-9690 Fax: 360-735-9300 www.roadmasterinc.com

CAUTION

Read the instructions before installing the kit components. Failure to understand how to install this product could result in property damage.



Kit components

This kit contains the components for two Nighthawk, Sterling or Sterling All Terrain handles –

- (2) handle arms
- (2) handle pads

Required tools

A 3/16" drift pin (or punch) and a hammer

Installation instructions

1. On the handle side of one of the locking mechanisms, position the drift pin (or punch) over the roll pin and hammer the roll pin down, approximately 1/2", until the handle can be pulled away (Figure 1).

CAUTION

Do not hammer the roll pin down any farther than is necessary to remove the handle. The locking pawl is connected to the roll pin. If the roll pin is driven too far down, the locking pawl will fall out, and the tow bar must be completely disassembled in order to reposition it.

2. Insert one of the handle pads over one of the replacement handles, and align the end of the handle with the 3/16" hole over the hole for the roll pin.

- 3. From the other side of the handle, drive the roll pin down, until the roll pin is flush to the edge of the handle (Figure 2).
- 4. Repeat for the other handle.

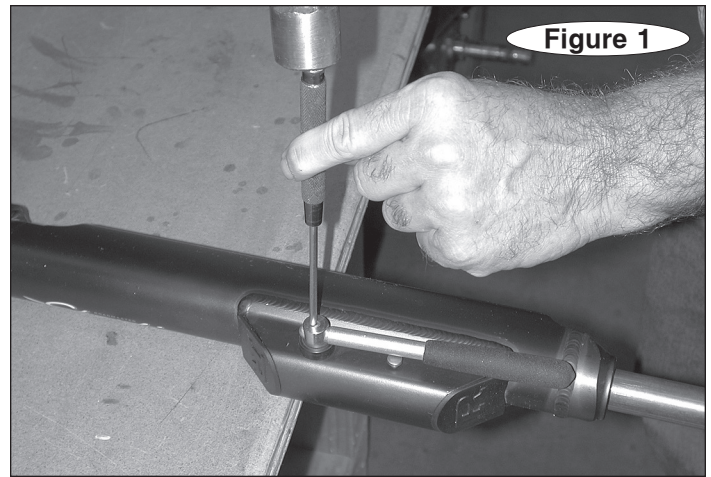


Figure 1



Figure 2

IMPORTANT NOTICE!

Safety Definitions

These instructions contain information that is very important to know and understand. This information is provided for **safety** and to **prevent equipment problems**. To help recognize this information, observe the following symbols:

WARNING

WARNING indicates a potentially hazardous situation which, if not avoided, could result in property damage, serious personal injury or even death.

CAUTION

CAUTION indicates a potentially hazardous situation which, if not avoided, may result in property damage, or minor or moderate personal injury.

CAUTION

CAUTION used without the safety alert symbol indicates a potentially hazardous situation which, if not avoided, may result in property damage.

NOTE

Refers to important information and is placed in italic type. It is recommended that you take special notice of these items.

910003-35

Sterling™ & Nighthawk™ handle replacement kit
for Nighthawk, Sterling and Sterling All-Terrain tow bars

Installation instructions

