



1-800-669-9690




SEAT ADAPTOR KIT #88129 INSTALLATION INSTRUCTIONS



3406-02

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

ROADMASTER, Inc. 6110 NE 127th Ave. Vancouver, WA 98682 1-800-669-9690 fax 360-735-9300 www.roadmasterinc.com

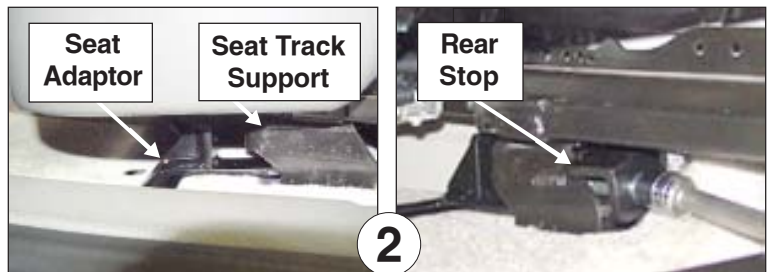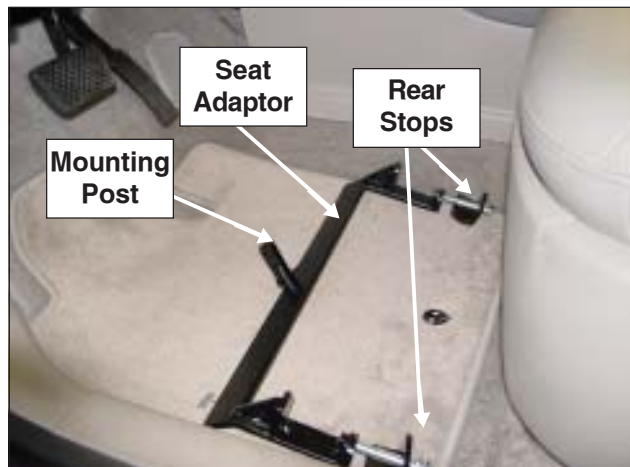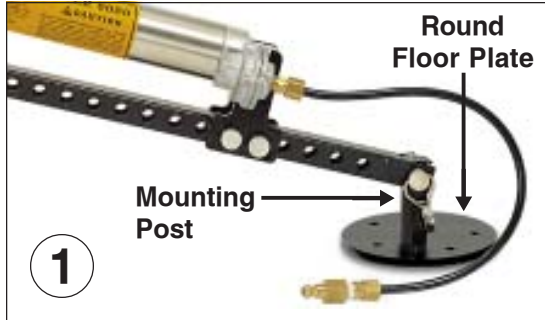

- ### Parts List
- (3) 3/8" lock washers
 - (1) 3/8" x 3/4" bolt
 - (2) 3/8" x 2 3/4" bolts

Instructions

1. Before installing the seat adaptor, the mounting post (that was included with your BrakeMaster system) must be removed from the round plate (Fig.1). Secure the round plate in a vise. Use a wrench to loosen the mounting post, while holding the bolt with an Allen wrench. Don't try to turn the Allen bolt with the Allen wrench, as you might damage the wrench or bolt. Use a 1/2" open-end wrench to twist the mounting post off. Then, secure the mounting post to the seat adaptor. Bolt the mounting post to the seat adaptor with the included 3/8" x 3/4" bolt and 3/8" lock washer.
2. Raise the seat all the way up and forward. Slide the seat adaptor through the opening in the seat track support. Position the rear stops over the rear openings in the seat support. Slide the 3/8" x 2 3/4" bolts and lock washers through the stops and thread into the nuts (Figure 2).

continued on next page

WARNING Failure to follow these instructions can result in property damage, personal injury or even death.



1-800-669-9690

SEAT ADAPTOR KIT #88129 INSTALLATION INSTRUCTIONS



3406-02

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

ROADMASTER, Inc. 6110 NE 127th Ave. Vancouver, WA 98682 1-800-669-9690 fax 360-735-9300 www.roadmasterinc.com

continued from preceding page

3. Use Figure 3 as a guide for the proper angle of the bracket before it is bolted down. *Note:* tighten the bolts from the rear seat.

4. Mount the air cylinder as shown in Figure 4.



WARNING

Failure to follow these instructions can result in property damage, personal injury or even death.