




# SEAT ADAPTOR KIT #88177 INSTALLATION INSTRUCTIONS



3064-01

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

ROADMASTER, Inc. 6110 NE 127th Ave. Vancouver, WA 98682 1-800-669-9690 fax 360-735-9300 www.roadmasterinc.com

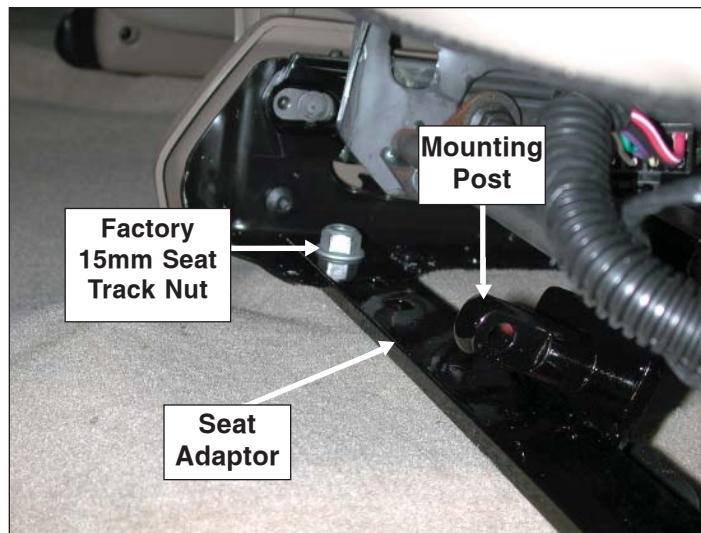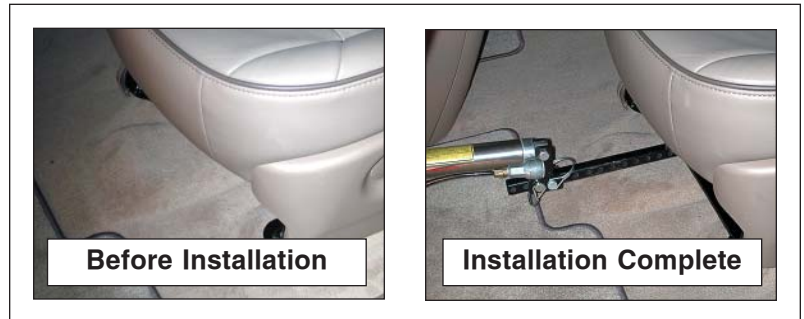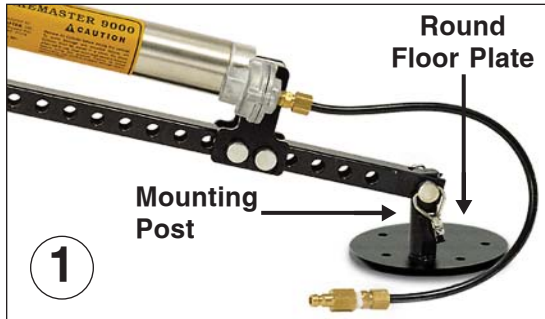

- ## Parts List
- (1) 3/8" lock washer
  - (1) 3/8" x 3/4" bolt

## Instructions

1. Before installing the seat adaptor, the mounting post (that was included with your BrakeMaster system) must be removed from the round plate (Fig.1). First, secure the round plate in a vise. Use a wrench to loosen the mounting post, while holding the bolt with an Allen wrench. Don't try to turn the Allen bolt with the Allen wrench, as you might damage the wrench or bolt. Use a 1/2" open-end wrench to twist the mounting post off. Then, secure the mounting post to the center of the seat adaptor, using the included 3/8" x 3/4" bolt and 3/8" lock washer.
2. Remove the two front 15mm (head) seat mounting nuts (one on each side). Slide the seat adaptor over the seat track, and over the front seat track mounting studs. Bolt the seat adaptor in place, using the factory nuts you removed earlier (Fig.2). Tighten the bolts.



**WARNING**

Failure to follow these instructions can result in property damage, personal injury or even death.