



1-800-669-9690



SEAT ADAPTOR KIT #88202 INSTALLATION INSTRUCTIONS



3120-01

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

ROADMASTER, Inc. 6110 NE 127th Ave. Vancouver, WA 98682 1-800-669-9690 fax 360-735-9300 www.roadmasterinc.com

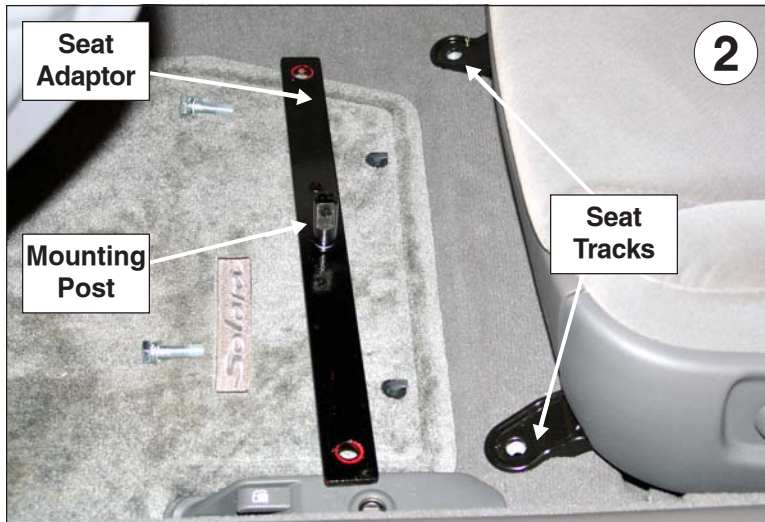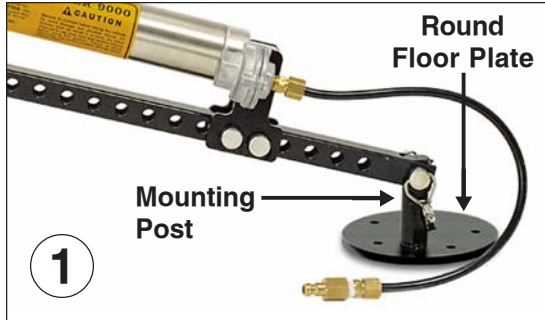

Parts List

- (1) 3/8" lock washer
- (1) 3/8" x 3/4" bolt
- (2) 10mm x 1.25 x 40mm bolts
- (2) 10mm lock washers
- (2) 10mm flat washers

Instructions

1. Before installing the seat adaptor, the mounting post (that was included with your BrakeMaster system) must be removed from the round plate (Fig.1). Secure the round plate in a vise. Use a wrench to loosen the mounting post, while holding the bolt with an Allen wrench. Don't try to turn the Allen bolt with the Allen wrench, as you might damage the wrench or bolt. Use a 1/2" open-end wrench to twist the mounting post off. Then, secure the mounting post to the seat adaptor. There are two mounting holes in the seat adaptor – select the one which aligns to the brake pedal. Bolt the mounting post to the seat adaptor with the included 3/8" x 3/4" bolt and 3/8" lock washer.
2. Remove the two 14mm (head) bolts (one on each side of the driver's seat) holding the front of the seat tracks to the floor. Position the seat adaptor over the top of the seat tracks, so that the pre-drilled holes at each end are over the holes for the seat track bolts you just removed. Then, bolt the seat adaptor in place, using one of the supplied 10mm x 1.25 x 40mm bolts, lock washers and flat washers on each side.



WARNING

Failure to follow these instructions can result in property damage, personal injury or even death.