




SEAT ADAPTOR KIT #88218 INSTALLATION INSTRUCTIONS



2871-01

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

ROADMASTER, Inc. 6110 NE 127th Ave. Vancouver, WA 98682 1-800-669-9690 fax 360-735-9300 www.roadmasterinc.com

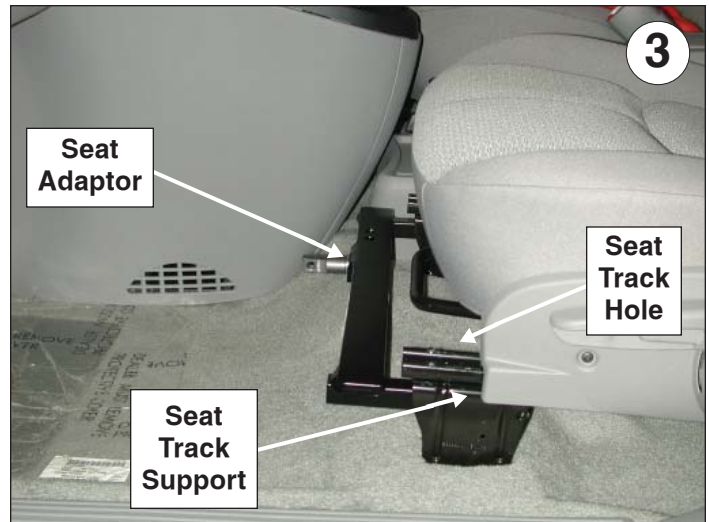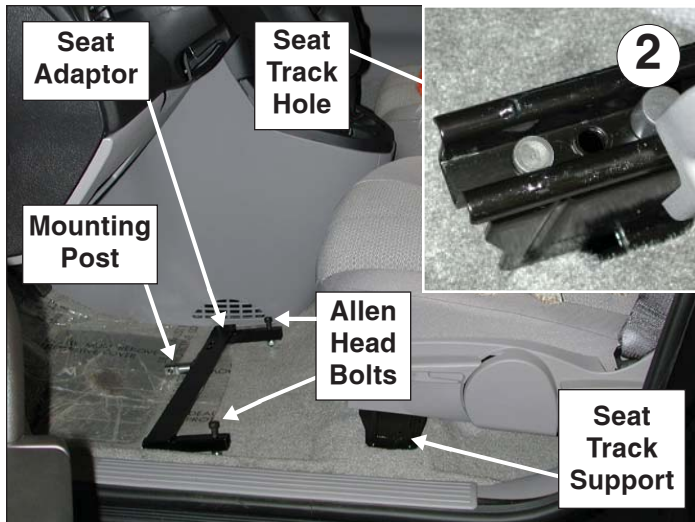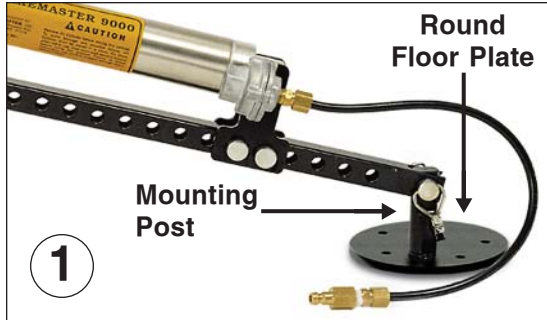

Instructions

1. Before installing the seat adaptor, the mounting post (that was included with your BrakeMaster system) must be removed from the round plate (Fig.1). Secure the round plate in a vise. Use a wrench to loosen the mounting post, while holding the bolt with an Allen wrench. Don't try to turn the Allen bolt with the Allen wrench, as you might damage the wrench or bolt. Use a 1/2" open-end wrench to twist the mounting post off.

2. Then, secure the mounting post to the center of the seat adaptor, using the included 3/8" x 3/4" bolt and 3/8" lock washer. Insert the two 45mm x 8mm Allen head bolts through the top of the holes in each seat track (inset).

3. Then, insert the seat adaptor through the seat track supports. Tighten the Allen head bolts, with the supplied 8mm x 1.25 nuts and the 8mm lock washers, through the seat track hole.

Parts List

- (1) 3/8" x 3/4" bolt
- (1) 3/8" lock washer
- (2) 8mm x 1.25 x 45mm Allen head bolts
- (2) 8mm lock washers
- (2) 8mm x 1.25 nuts



WARNING

Failure to follow these instructions can result in property damage, personal injury or even death.