



SEAT ADAPTOR KIT #88235 INSTALLATION INSTRUCTIONS



3059-02

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

ROADMASTER, Inc. 6110 NE 127th Ave. Vancouver, WA 98682 1-800-669-9690 fax 360-735-9300 www.roadmasterinc.com

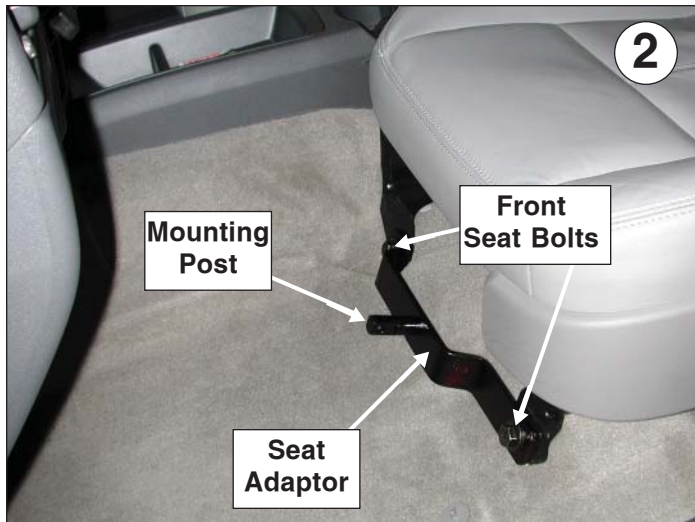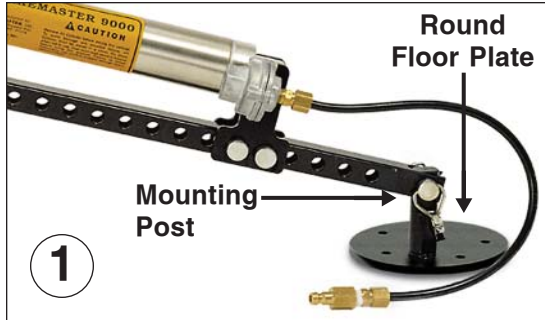

- ## Parts List
- (1) 3/8" x 3/4" bolt
 - (1) 3/8" lock washer

Instructions

1. Before installing the seat adaptor, the mounting post (that was included with your BrakeMaster system) must be removed from the round plate (Figure 1). Secure the round plate in a vise. Use a wrench to loosen the mounting post, while holding the bolt with an Allen wrench. Don't try to turn the Allen bolt with the Allen wrench, as you might damage the wrench or bolt. Use a 1/2" open-end wrench to twist the mounting post off. Bolt the mounting post to the the seat adaptor, using the included 3/8" x 3/4" bolt and 3/8" lock washer.

2. Unscrew the two 18mm head front seat bolts. The mounting post on the seat adaptor is slightly offset, to line up with the vehicle's brake pedal. Check the alignment of the mounting post to the brake pedal, then slide the seat adaptor over the seat track, and over the front seat bolt holes. Bolt the seat adaptor in place, using the factory bolts you removed earlier. Tighten the bolts.