





# SEAT ADAPTOR KIT #88257 INSTALLATION INSTRUCTIONS



3911-01

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

ROADMASTER, Inc. 6110 NE 127th Ave. Vancouver, WA 98682 1-800-669-9690 fax 360-735-9300 www.roadmasterinc.com

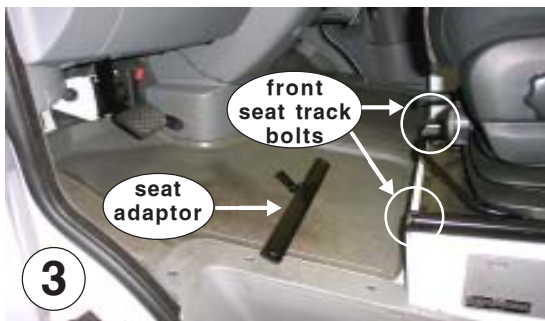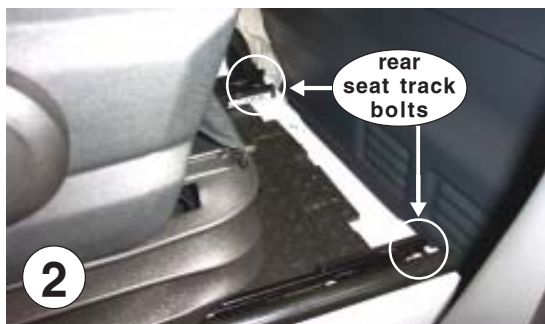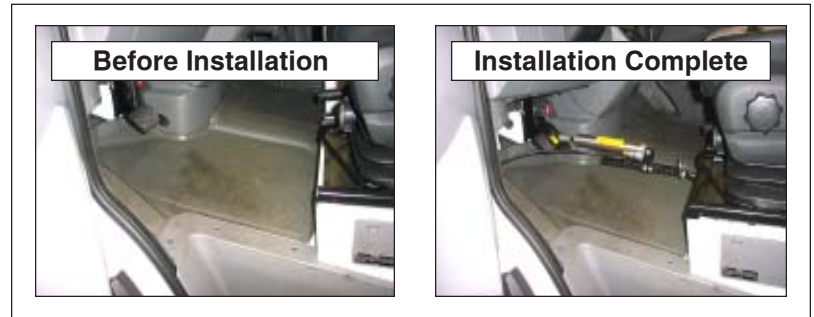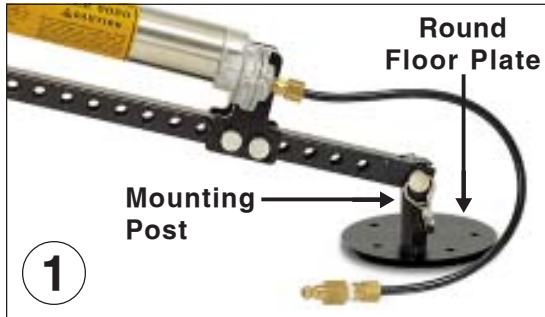

## Instructions

1. Before installing the seat adaptor, the mounting post (that was included with your BrakeMaster system) must be removed from the round plate (Fig.1). First, secure the round plate in a vise. Use a wrench to loosen the mounting post, while holding the bolt with an Allen wrench. Don't try to turn the Allen bolt with the Allen wrench, as you might damage the wrench or bolt. Use a 1/2" open-end wrench to twist the mounting post off. Then, secure the mounting post to the center of the seat adaptor, using the included 3/8" x 3/4" bolt and 3/8" lock washer.
2. Using an 11mm six point socket, loosen the rear seat track bolts on the driver's seat (Fig.2). Then, remove the front seat track bolts (Fig.3).
3. Place the seat bracket between the seat tracks and the seat pedestal. Replace the bolts that were removed in step 2.
4. Make sure the mounting post (Fig.1) is directly in line with the brake pedal before adjusting the air cylinder, per the BrakeMaster instructions. *Note:* the BrakeMaster air cylinder may jam or function incorrectly if the mounting post is not directly in line with the brake pedal.

## Parts List

- (1) 3/8" x 3/4" bolt
- (1) 3/8" lock washer



## WARNING

Failure to follow these instructions can result in property damage, personal injury or even death.