


SEAT ADAPTOR KIT #88269 INSTALLATION INSTRUCTIONS



4168-00 09-08

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

ROADMASTER, Inc. 6110 NE 127th Ave. Vancouver, WA 98682 1-800-669-9690 fax 360-735-9300 www.roadmasterinc.com

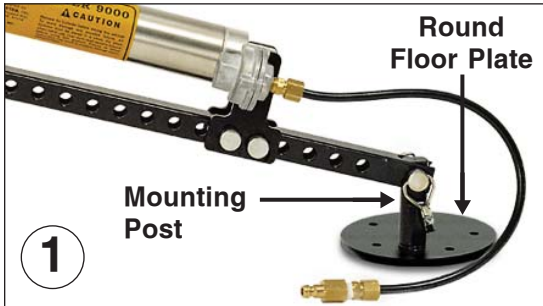

Instructions

- 1.** Before installing the seat adaptor, the mounting post (which was included with your BrakeMaster system) must be removed from the round plate (Fig.1). First, secure the round plate in a vise. Use a wrench to loosen the mounting post, while holding the bolt with an Allen wrench. Don't try to turn the Allen bolt with the Allen wrench, as you might damage the wrench or bolt. Use a 1/2" open-end wrench to twist the mounting post off. Then, secure the mounting post to the center of the seat adaptor using the included 3/8" x 3/4" bolt and 3/8" lock washer.
- 2.** Remove the two 12mm (head) front seat track bolts (Fig.2).
- 3.** Remove the rear seat track cover and loosen the two 12mm (head) bolts. Place the seat adaptor between the seat tracks and the floor. *Note:* the mounting post on the adaptor (Fig.1) must be directly in line to the brake pedal. The BrakeMaster air cylinder may jam or function incorrectly if the mounting post is not directly in line with the brake pedal.
- 4.** Replace the front seat track bolts, and tighten. Tighten the rear seat track bolts, and replace the cover.
- 5.** Attach the air cylinder to the adaptor.

Parts List

- (1) 3/8" x 3/4" bolt
- (1) 3/8" lock washer



WARNING

Failure to follow these instructions can result in property damage, personal injury or even death.