



SEAT ADAPTER KIT #88295 INSTALLATION INSTRUCTIONS



4743-02

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

ROADMASTER, Inc. 6110 NE 127th Ave. Vancouver, WA 98682 360-896-0407 fax 360-735-9300 www.roadmasterinc.com

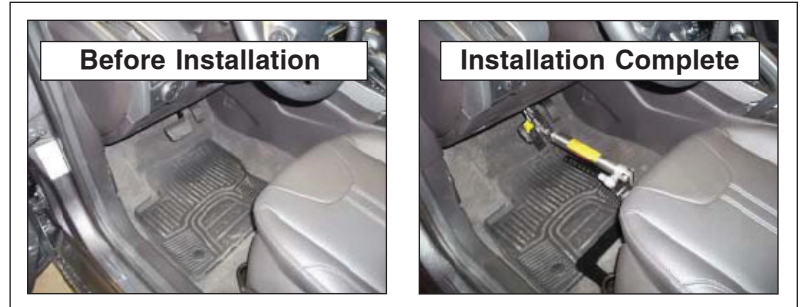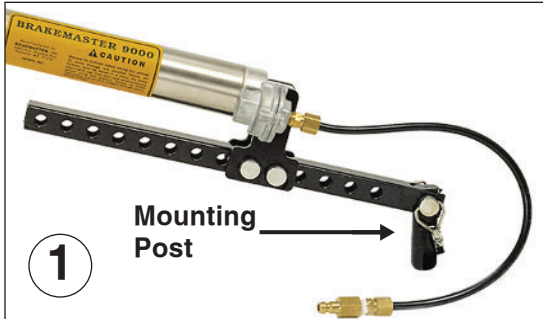

Instructions



1. Locate the mounting post (Fig.1) that came with your BrakeMaster. If needed, order part number 450596. Now, secure the post to the center of the seat adapter using the included 3/8" x 3/4" bolt and 3/8" lock washer. If the hole is countersunk, use the Allen head bolt and lock washer included with this kit.



2. Slide the seat all the way forward and loosen the two T45 Torx rear seat track bolts (Fig.2).

3. Slide the seat all the way back and remove the two T45 Torx front seat track bolts (Fig.3).



4. Place the seat adapter between the floor and the front seat tracks and replace the factory bolts (Fig.4). Note: position the adapter so that the mounting post (Fig.1) is directly in line to the brake pedal. The BrakeMaster air cylinder may jam or function incorrectly if the mounting post is not directly in line with the brake pedal.

5. Now, tighten the rear seat track bolts and then attach the air cylinder to the adapter.

Parts List

- (1) 3/8" lock washer
- (1) 3/8" x 3/4" bolt



WARNING

Failure to follow these instructions can result in property damage, personal injury or even death.