



SEAT ADAPTER KIT #88358 INSTALLATION INSTRUCTIONS



6124-00

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

ROADMASTER, Inc. 6110 NE 127th Ave. Vancouver, WA 98682 360-896-0407 fax 360-735-9300 www.roadmasterinc.com

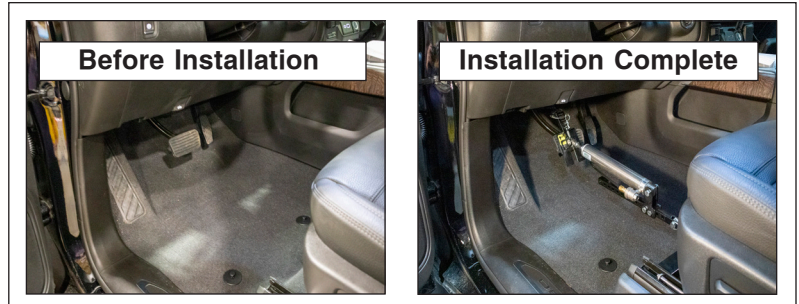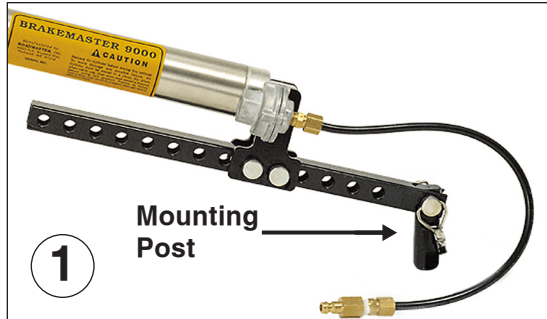

Instructions

1. Locate the mounting post (Fig.1) that came with your BrakeMaster. If needed, order part number 450596. Now, secure the post to the center of the seat adapter using the included 3/8" x 3/4" bolt and 3/8" lock washer. If the hole is countersunk, use the Allen head bolt and lock washer included with this kit.
2. Push the seat back as far as it will go. On each side, remove one T55 Torx bolt (Fig.2).
3. Tilt the seat upward and slide the seat adapter under the seat track, ensuring that the square end is under the passenger side seat track (Fig.3) . *Note:* On the passenger side, there is a protrusion that must nest completely within the square opening. Ensure it is lined up before proceeding to the next step.
4. Replace the T55 bolts and tighten them (Fig.4).
5. Attach the air cylinder to the adapter. *Note:* the mounting post on the adapter (Fig.1) must be directly in line to the brake pedal. The BrakeMaster air cylinder may jam or function incorrectly if the mounting post is not directly in line with the brake pedal.

Parts List

- (1) 3/8" x 3/4" bolt
- (1) 3/8" lock washer



WARNING

Failure to follow these instructions can result in property damage, personal injury or even death.